


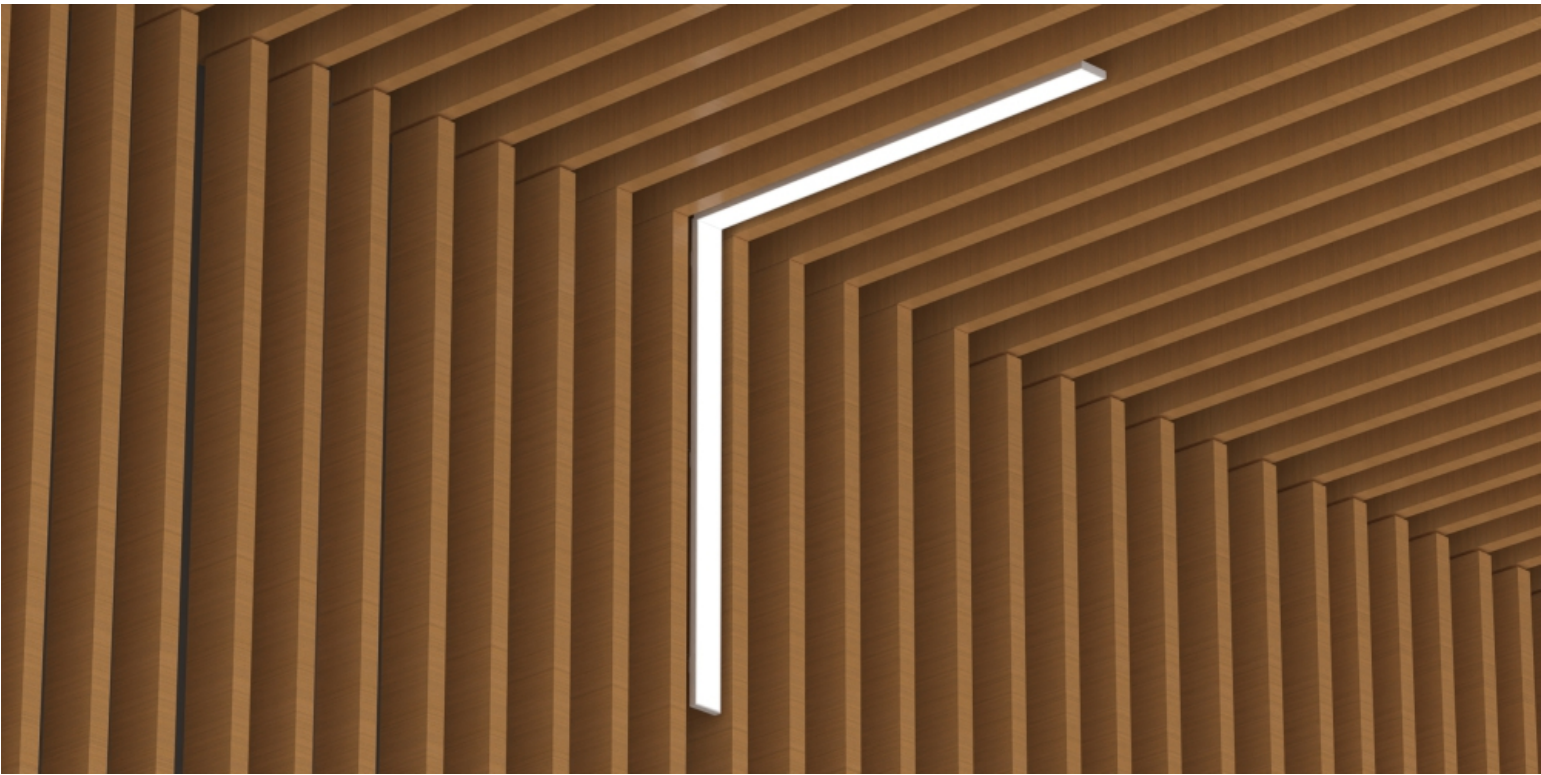

archlit reserves the right to make changes without prior notice. (08.06.2026)

ChriBa 2 Slots, extruded aluminum minimal design lighting fixture with remote drivers (max 20' from fixture). Powder-coated finish and diffuser for even illumination at highest lumen output. xx lumens delivered per foot, 11 w/foot. Dimmable and non dimmable. Based on Armstrong WoodWorks linear solid wood panels and WoodWorks linear veneered panels. Lighting module width 1.75".

ChBa2Slo

ChriBa 2 Slots

Acronym of model

ChBa2Slo -
Please add at beginning of spec

Lumen Output

H35 - 3500 K 840 lumens/foot 7.5 w/ f
35HO - 3500 K 1530 lumen/foot 15 w/f
40 - 4000 K 840 lumen/foot 7.5 w/ f
40HO - 4000 K 1530 lumen/foot 15 w/f
2700 K and 3000 K available for special ordering
Consult factory for other color temperatures
Max 8' nominal length with std output
HO max. length 5' nominal
HO max. length 5' nominal with (1) driver as class 2
Runs lengths may result in light leaks between fixtures

Finish

WH - White
BK - Black
CU - Custom Specify RAL color
set up charges apply

Runs

B - Module 2' 23 3/4"
C - Module 3' 35 5/8"
D - Module 4' 47 3/8"
E - Module 5' 59 1/8"
F - Module 6' 71"
G - Module 7' 82 3/4"
H - Module 8' 94 5/8"

Total Run: (0 ft 0 in)
Runs lengths may result in light leaks between fixtures

Dimming

4 - Dimmable 0-10v (4wires, 120 or 277 v)
1 - Non Dimmable 277v
0 - Non Dimmable 120v

Emergency

00 - No Emergency
EM - Emergency module max. 4'





Notes:



Drivers are Remote. max segment length 8'

Max distance to drivers 20'

CRI more than 90. McAdam 3 bin


archlit will prepare runs submittals


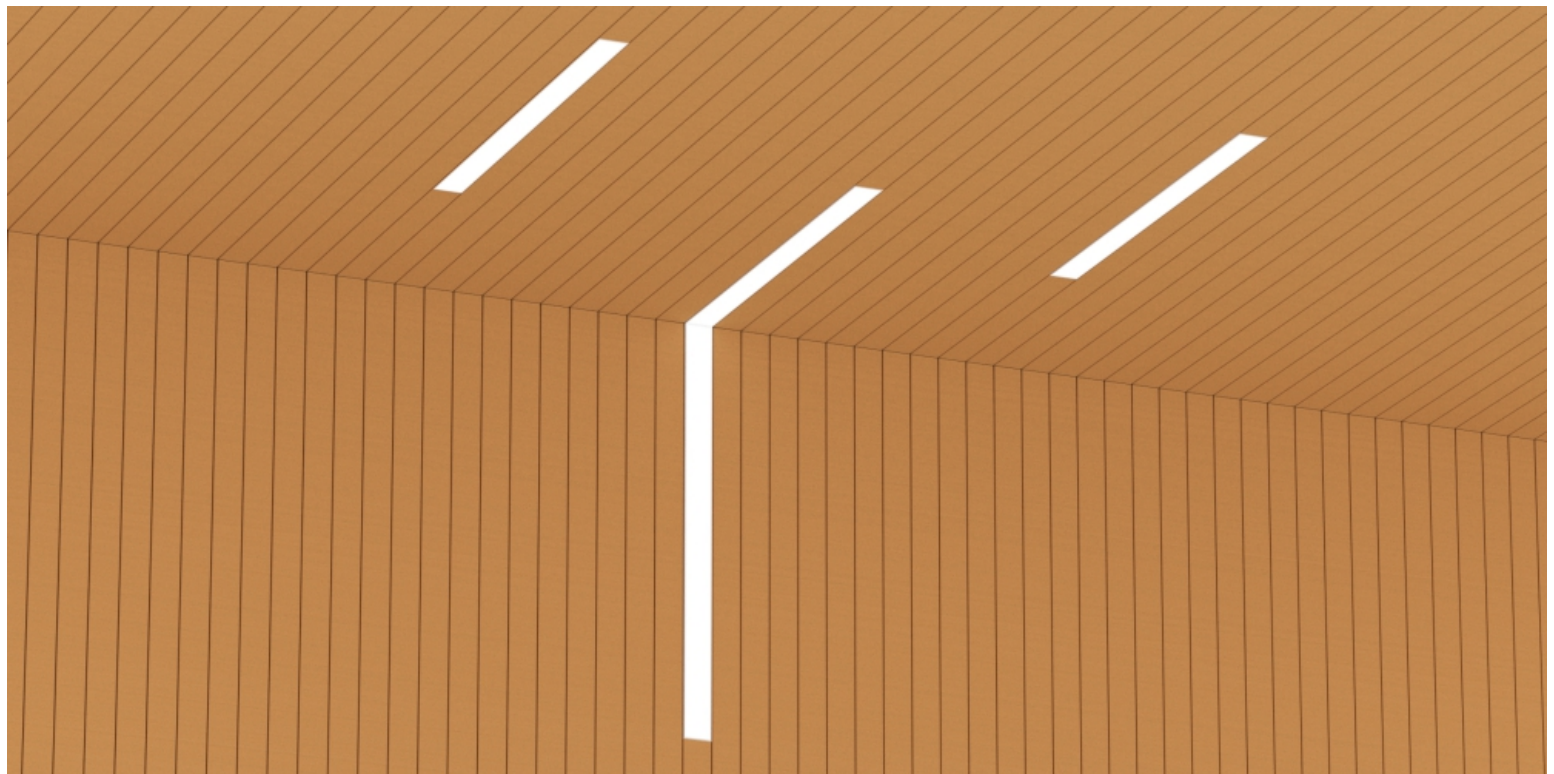
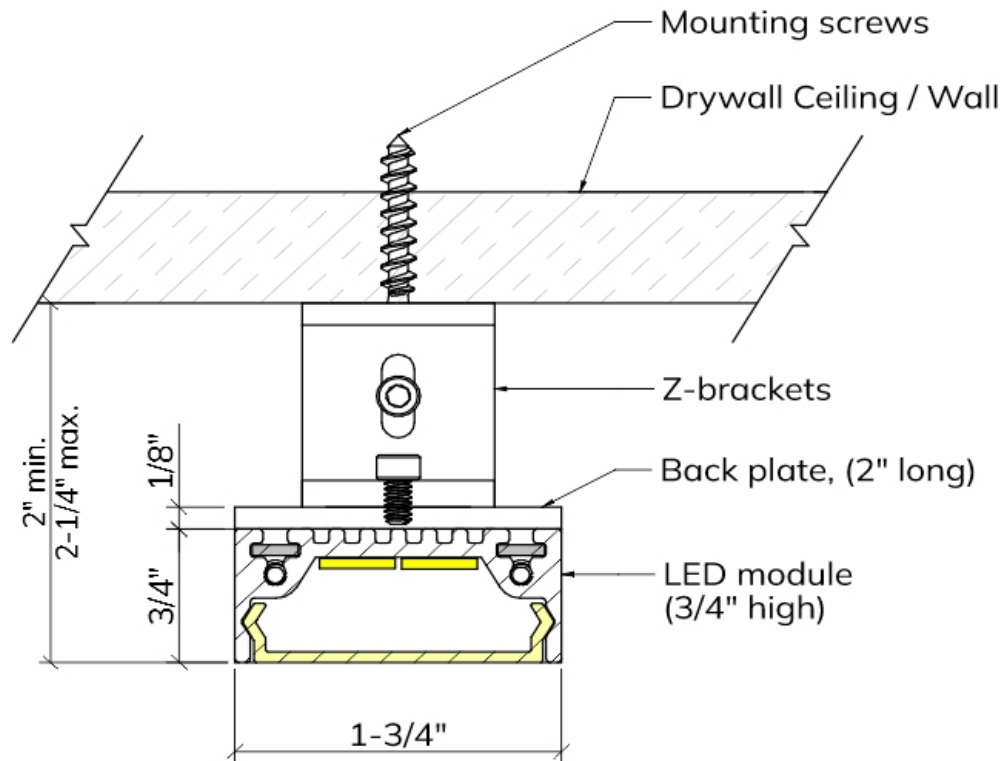


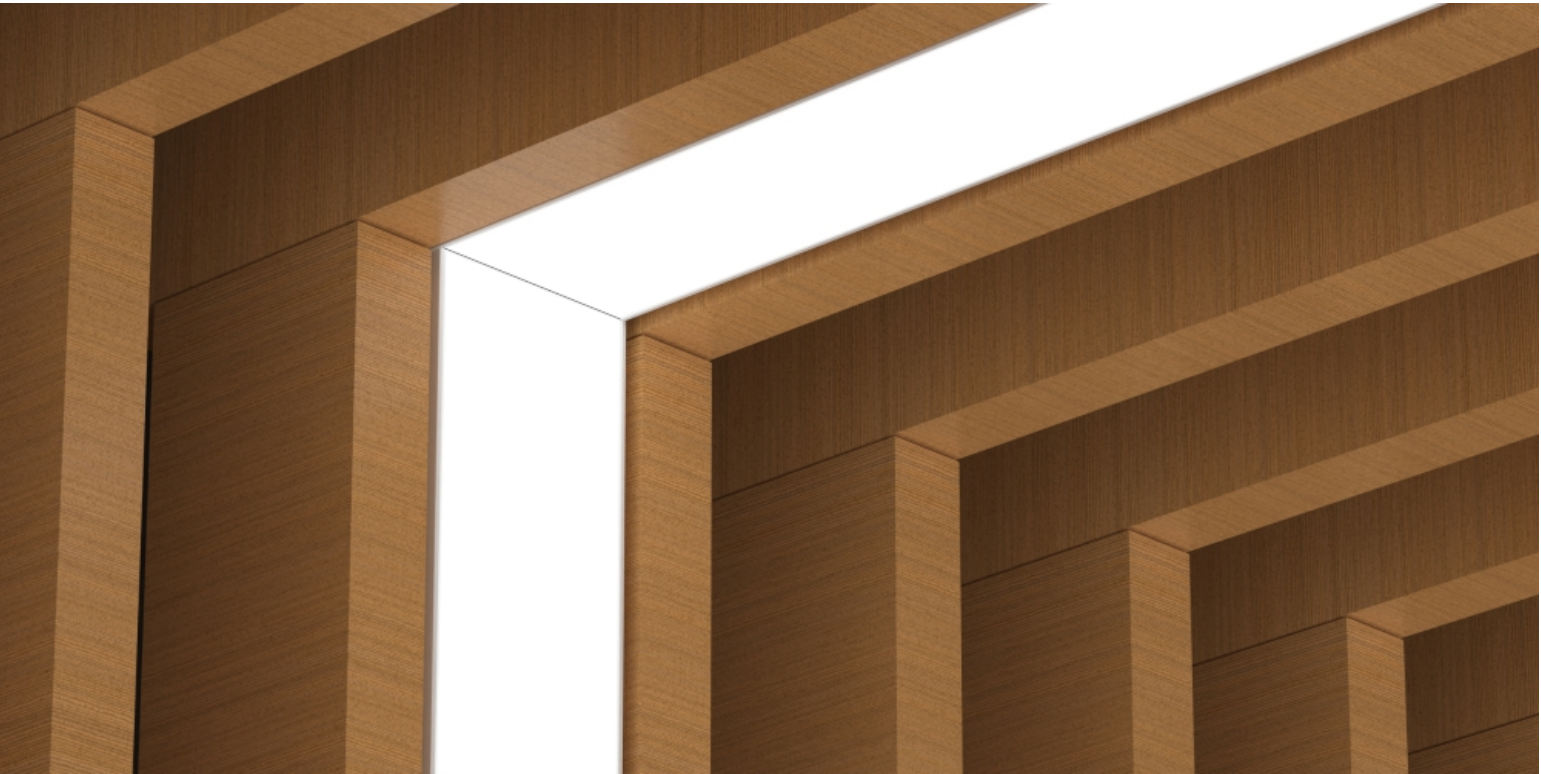
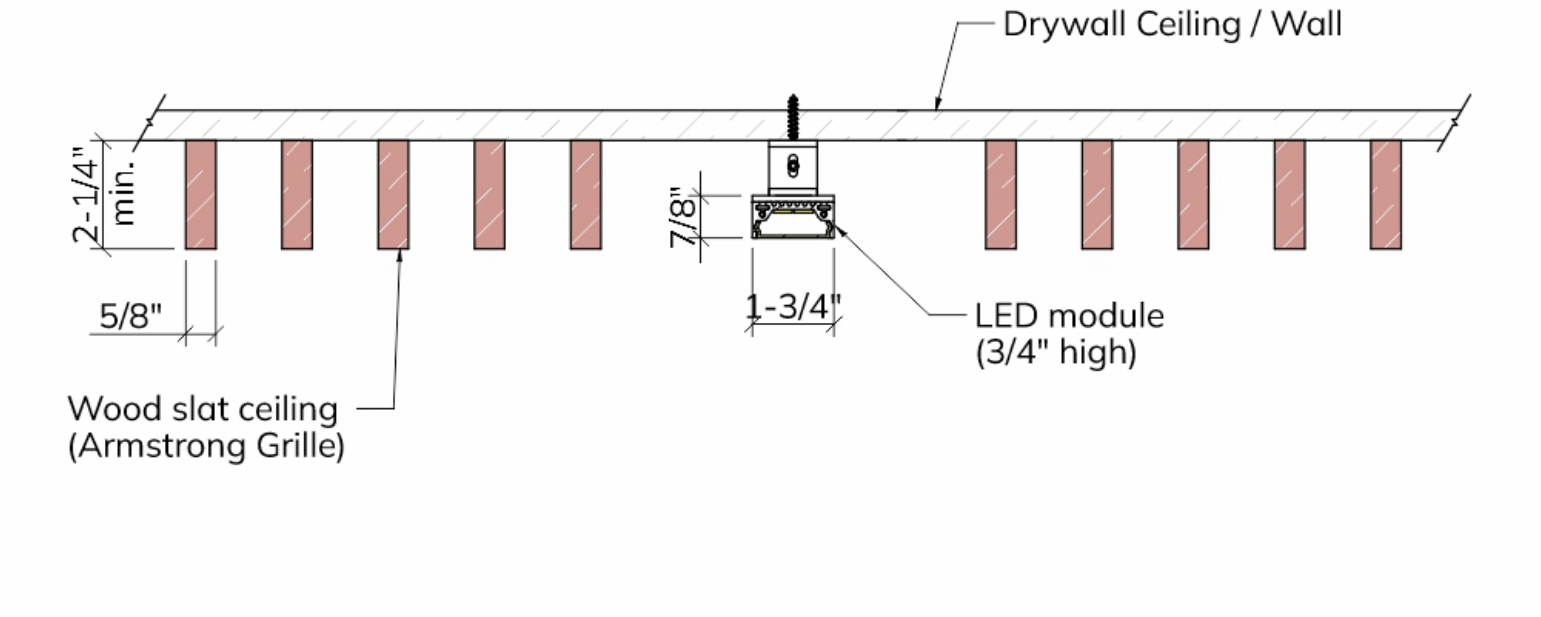





ChriBa2 / Grid brackets

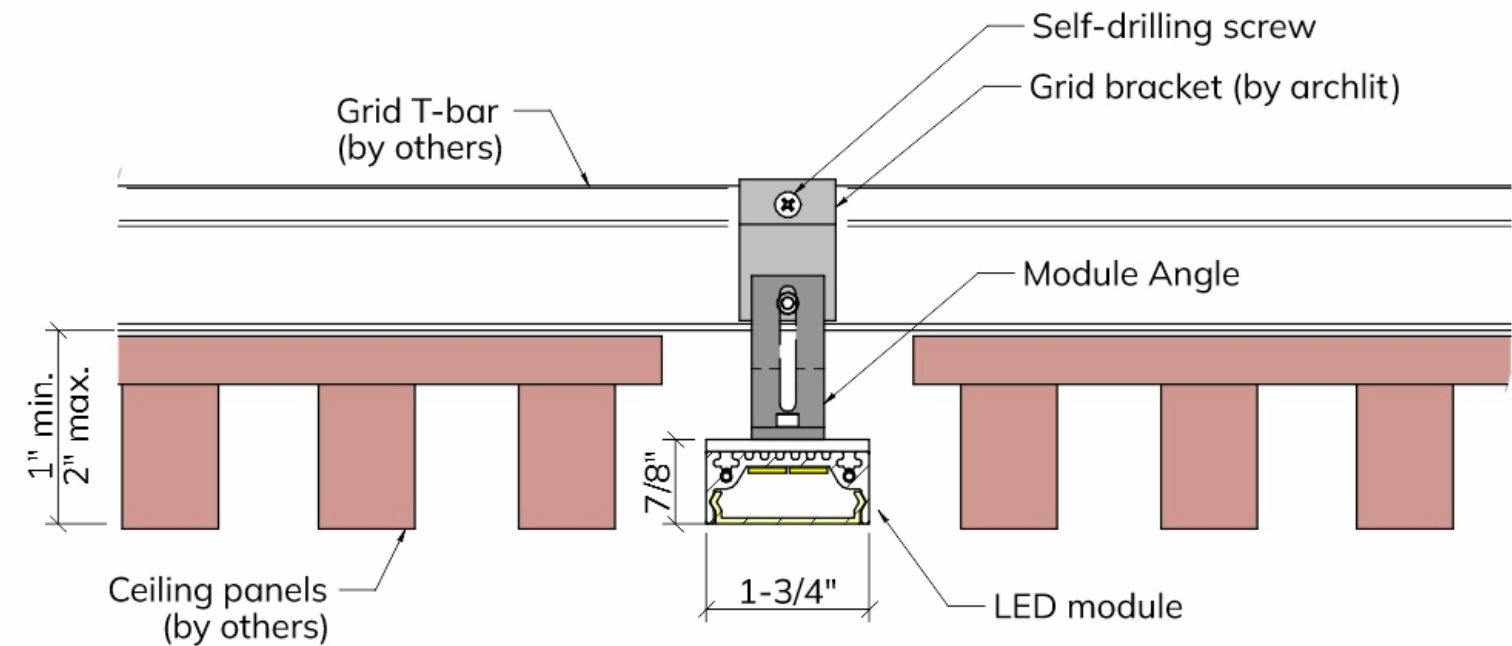

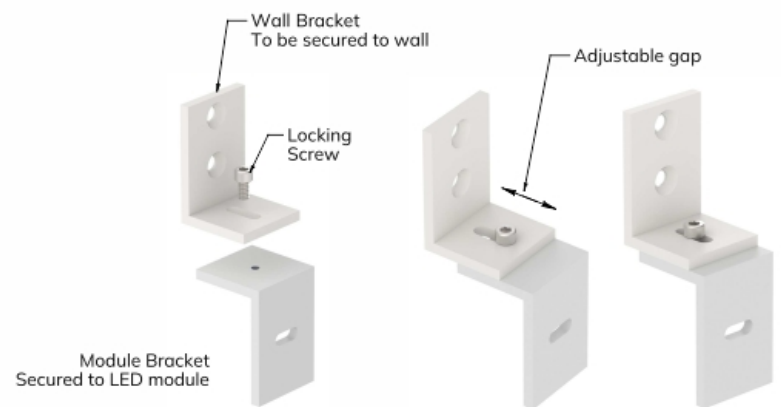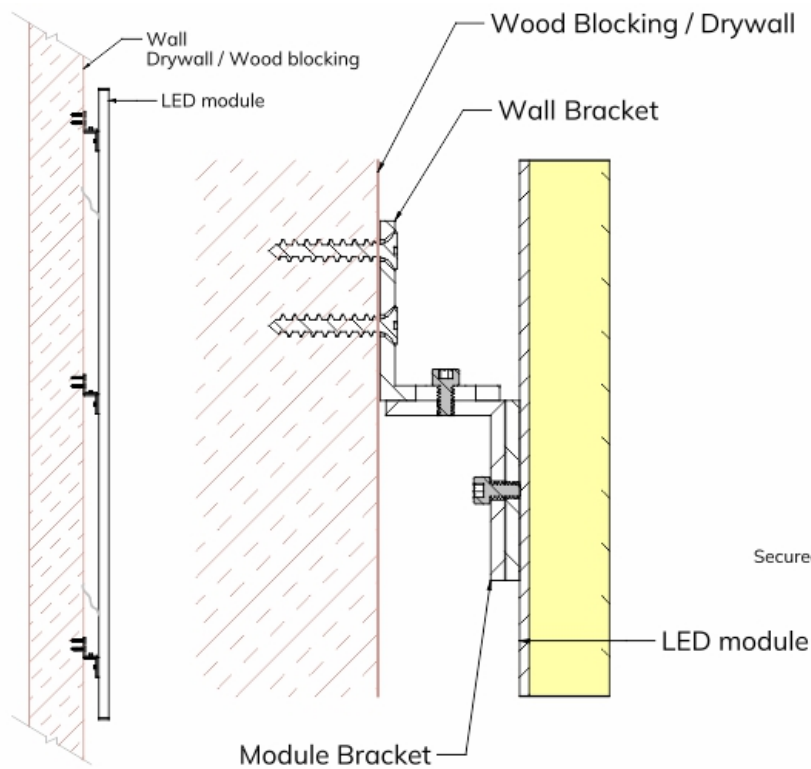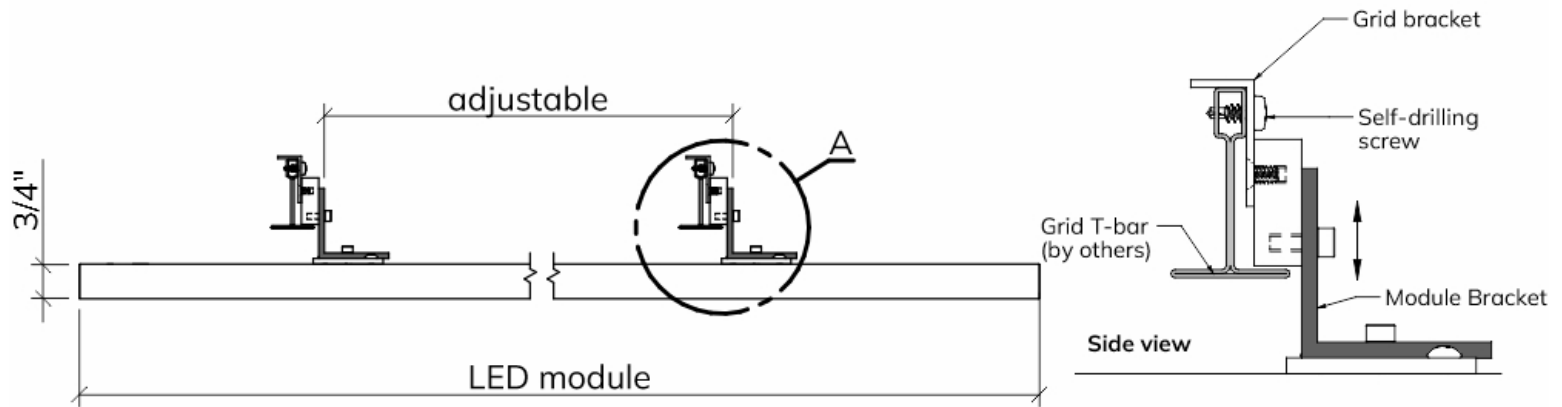

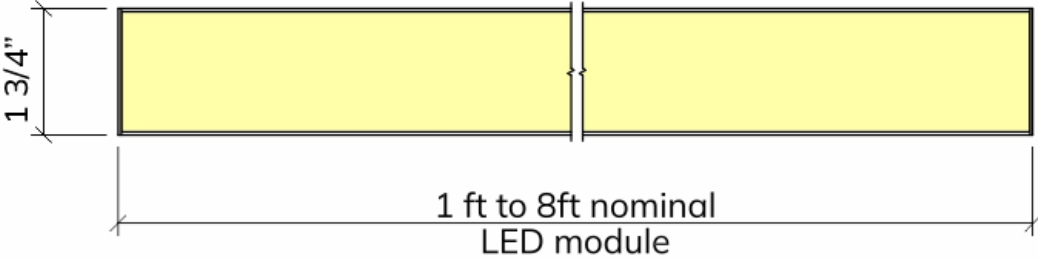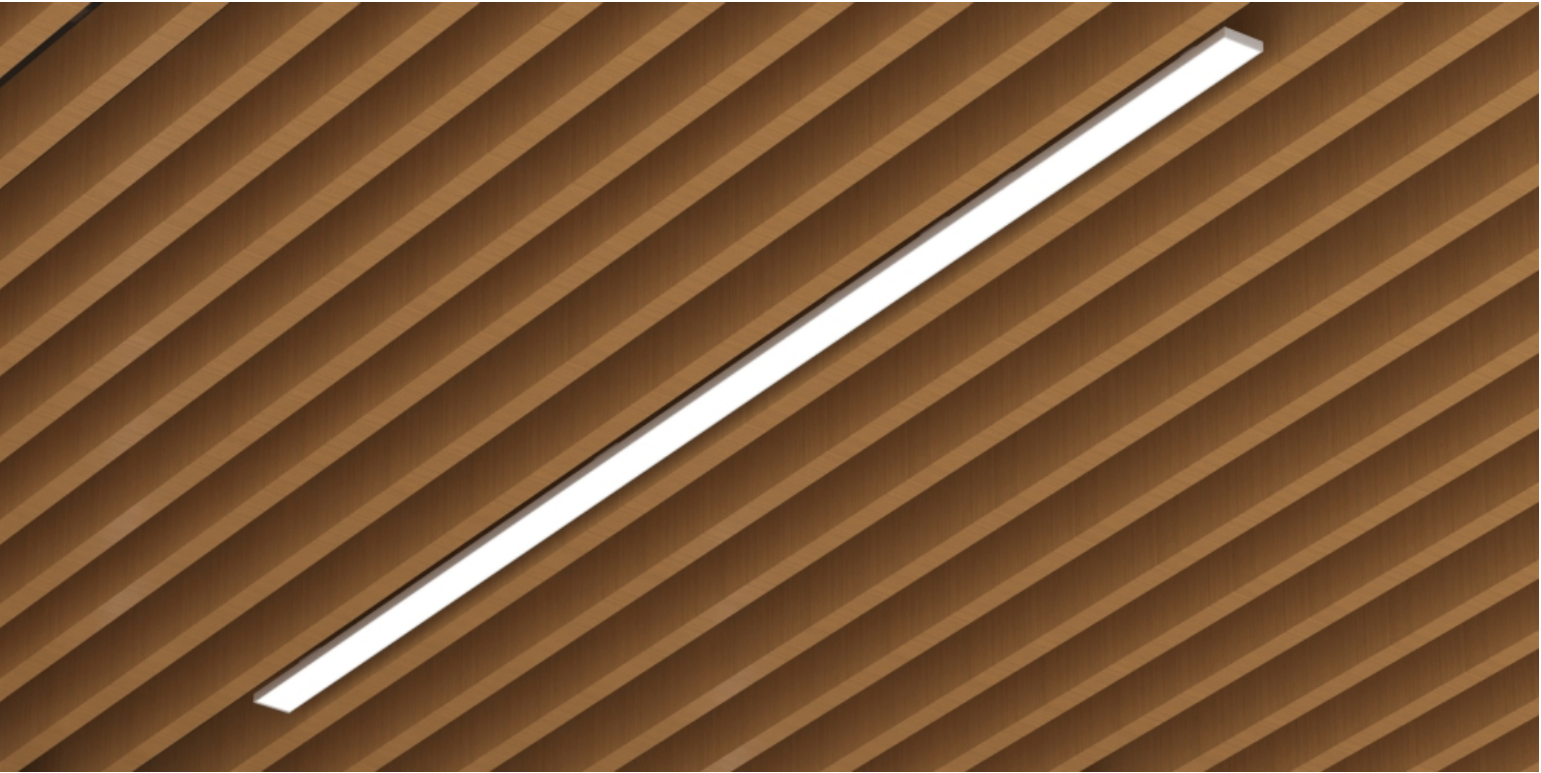


Individual module

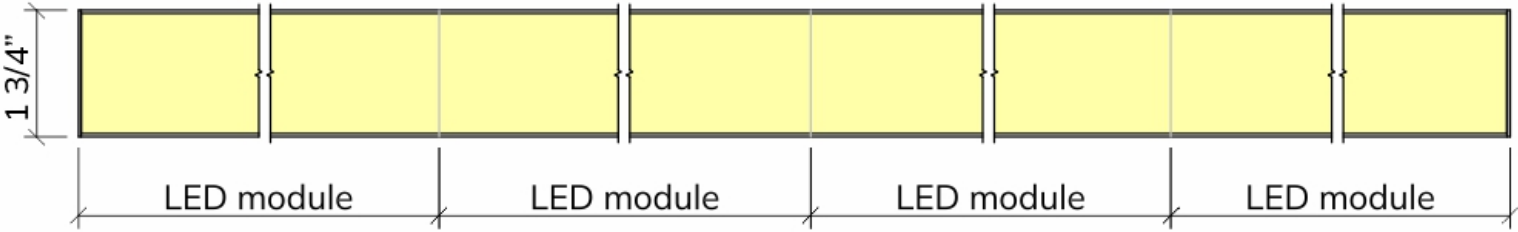

Continuous Run



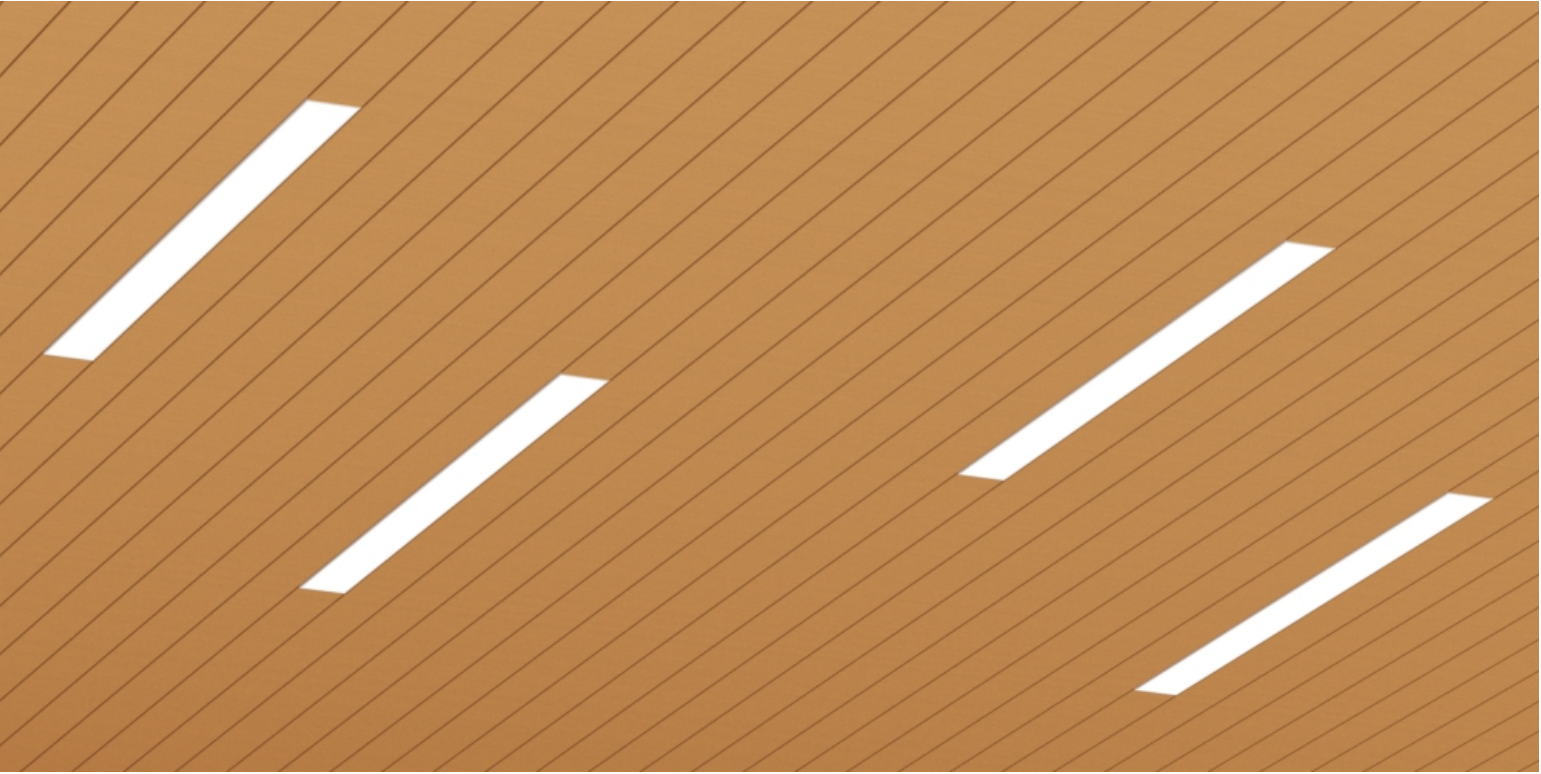

Driver Boxes

