



archlit reserves the right to make changes without prior notice. (07.12.2026)

ChriBa 3 CeiWall extruded aluminum minimal design lighting fixture with remote drivers (max 20' from fixture). Powder-coated finish and diffuser for even illumination at highest lumen output. 1,250 lumens delivered per foot, 11 w/foot. Dimmable and non dimmable. Individual and runs assemblies

Chri3Ceiw

ChriBa 3 CeiWall

Fixture Code

Chri3Ceiw -

Please always start spec with code

Lumen Output

35HO - 3500 K 1260 lumens / ft 12 w /ft

40HO - 4000 K 1280 lumens / ft 12 w /ft

2700 K and 3000 K available for special ordering

Consult factory for other color temperatures

Finish

WH - White

BK - Black

CU - Custom Specify RAL color

set up charges apply

Dimming

4 - Dimmable 0-10v (4wires, 120 or 277 v)

1 - Non Dimmable 277v

0 - Non Dimmable 120v

Installation

Cei - Ceiling

Wa - Wall

Specify qty of vertical (wall) and horizontal (ceiling)

Runs

B - 2' nominal 23" LED module

C - 3' nominal 35 LED module

D - 4' nominal 47" LED module

E - 5' nominal 59" LED module

F - 6' nominal 71" LED module

G - 7' nominal 83" LED module

H - 8' nominal 95" LED module

Total Run: (0 ft 0 in)

Runs lengths may result in light leaks between fixtures



Emergency

00 - No Emergency

EM - Emergency module max. 4'

Notes:



Drivers are Remote. max segment length 8'


Max distance to drivers 60'



CRI more than 90. McAdam 3 bin

Specify Qty of vertical (wall) and horizontal (ceiling)


archlit will generate submittals in case of runs specified

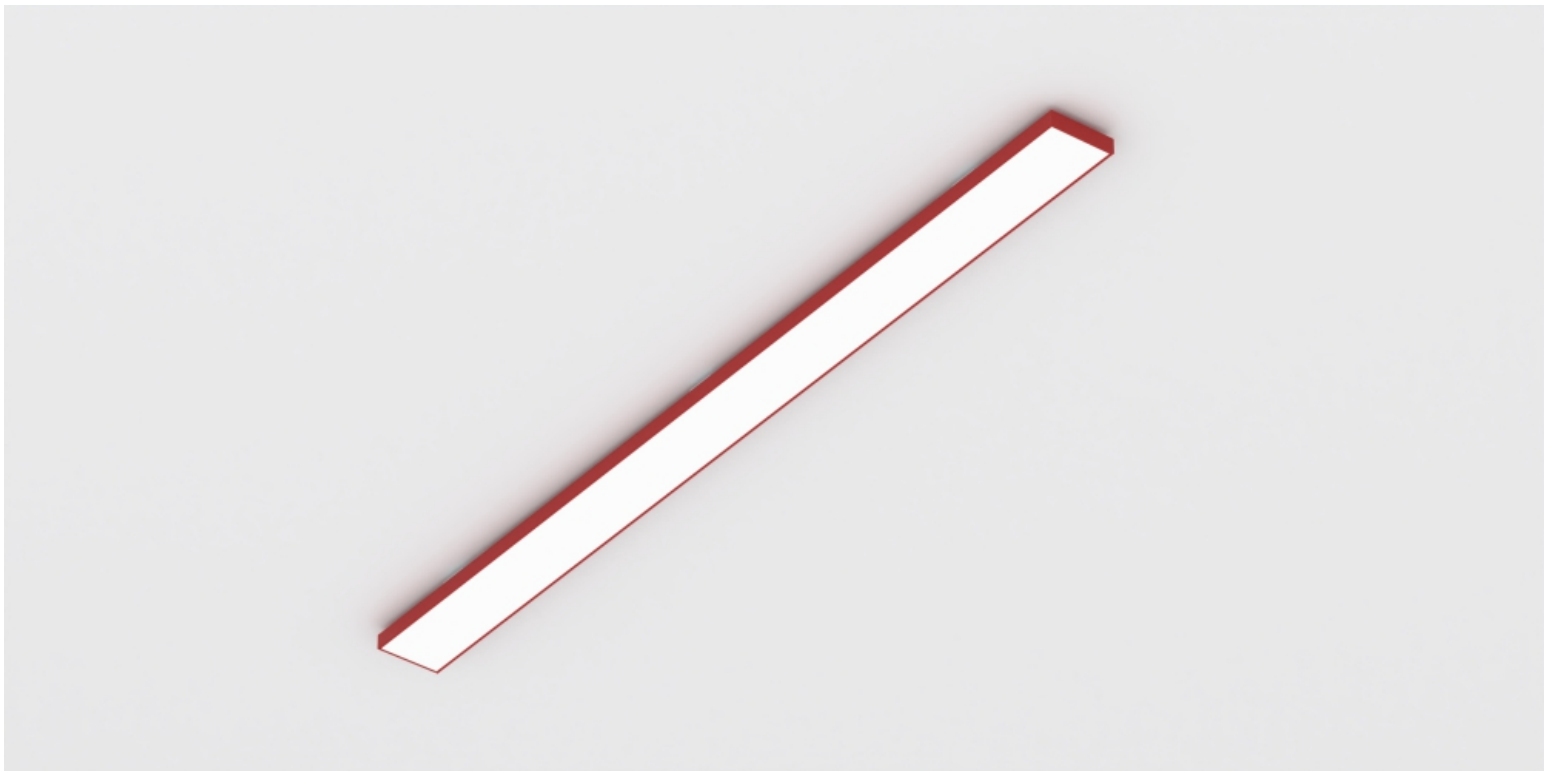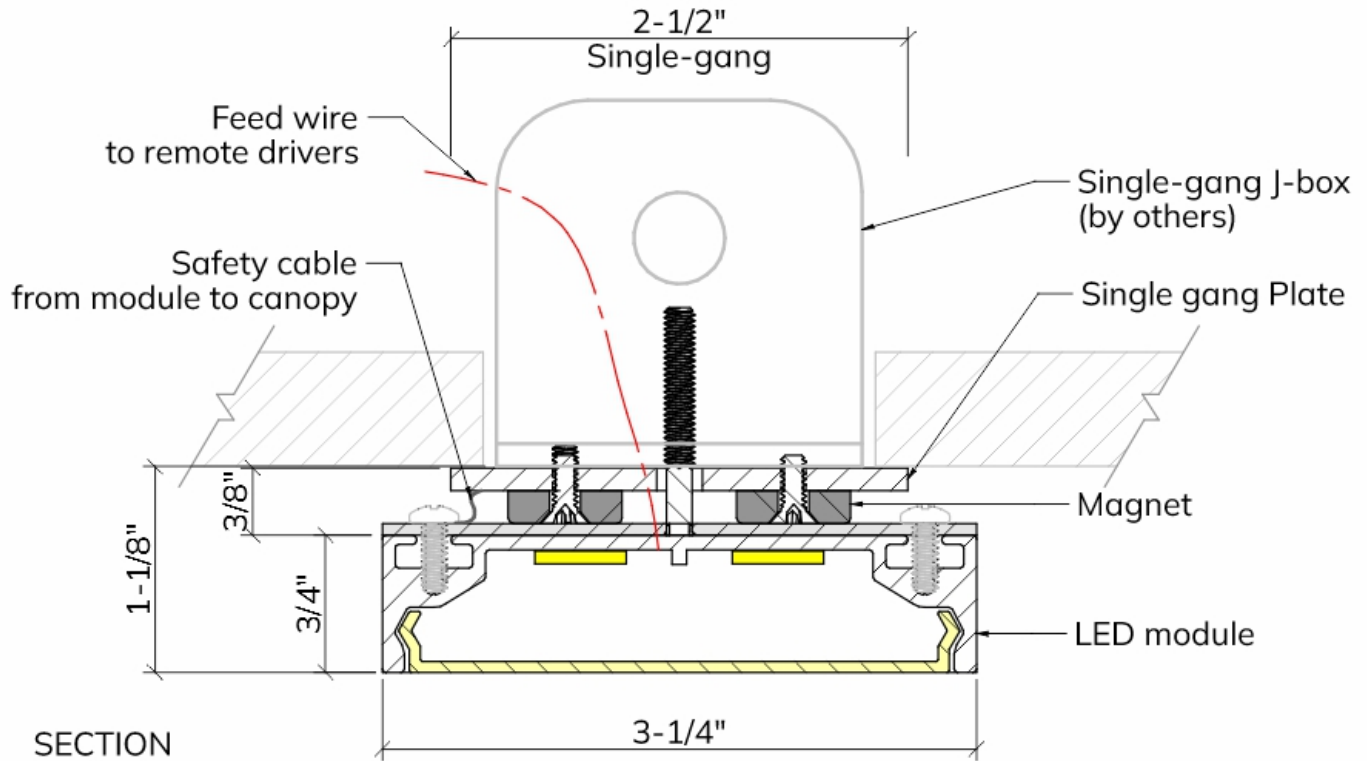

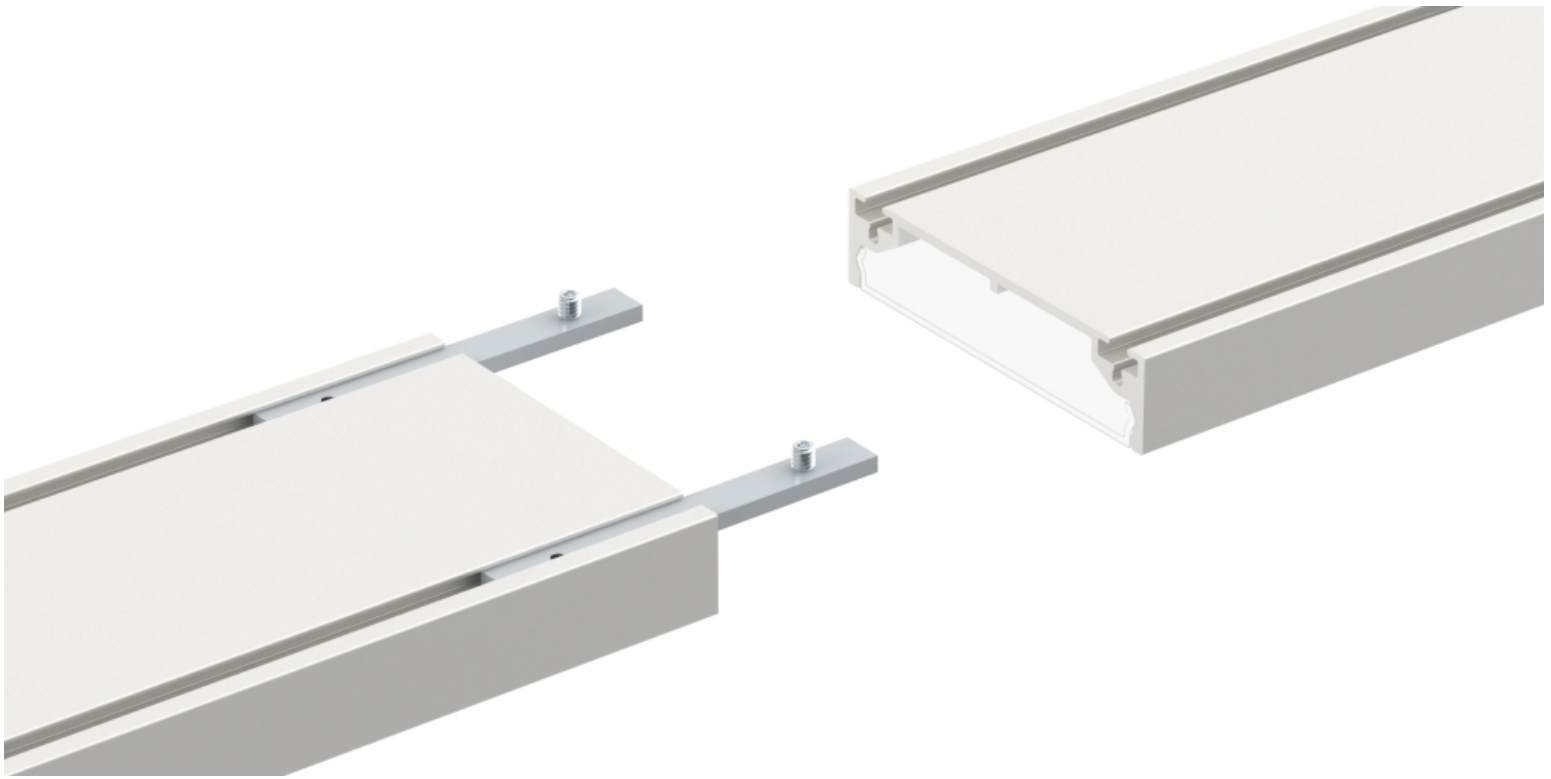

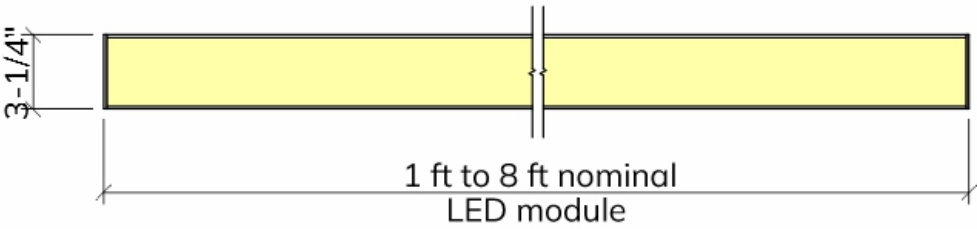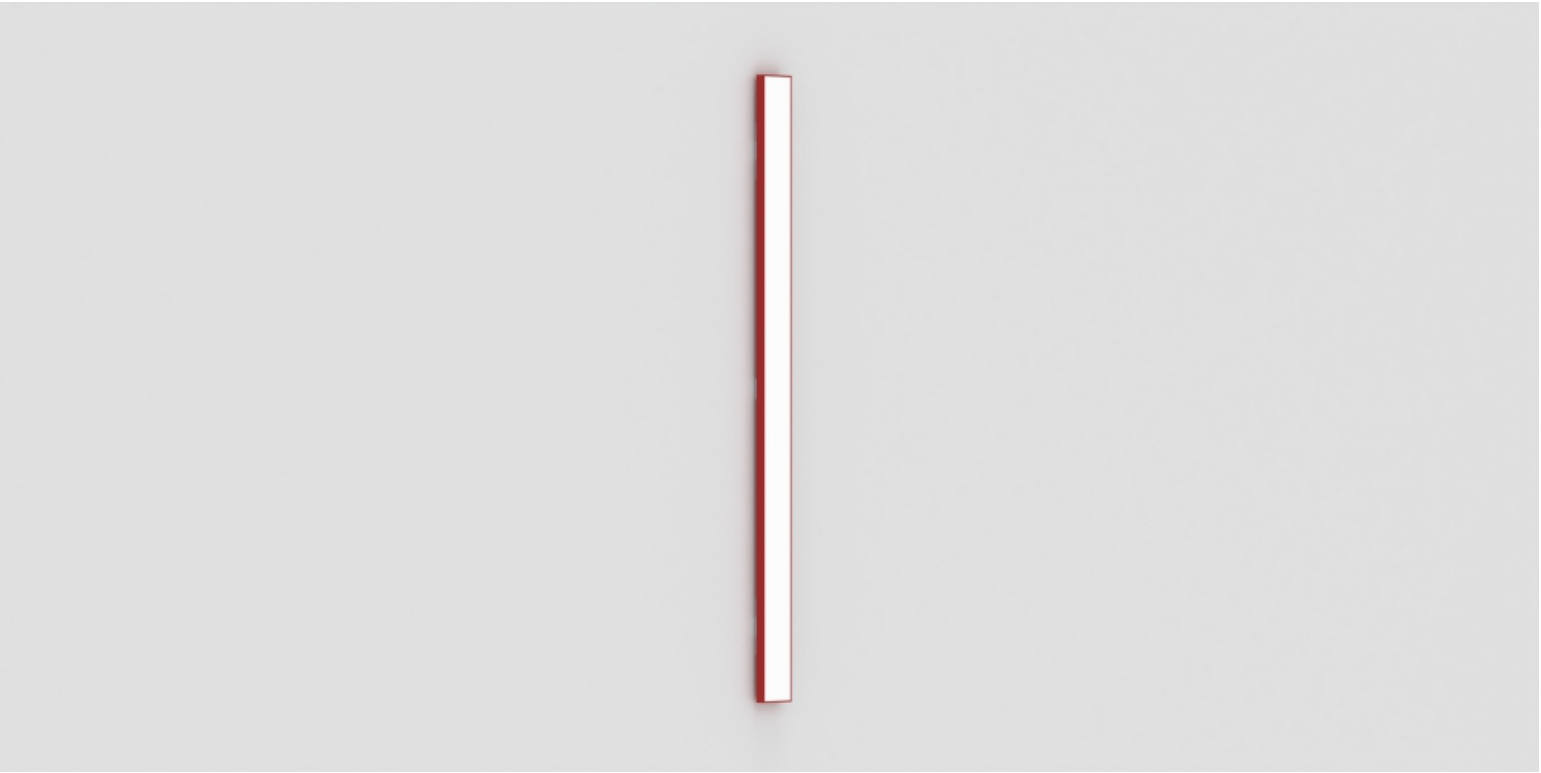

Individual module

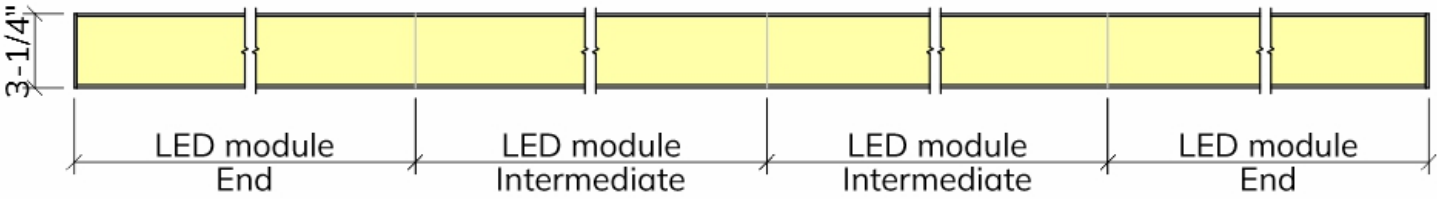

Continuous Run





Nominal foot	Intermediate Module length	End module length
1' only as filler	12"	12-1/8"
2'	23-3/4"	23-7/8"
3'	35-5/8"	35-3/4"
4'	47-3/8"	47-1/2"
5'	59-1/8"	59-1/4"
6'	71"	71-1/8"
7'	82-3/4"	82-7/8"
8'	94-5/8"	94-3/4"

Driver Boxes

