


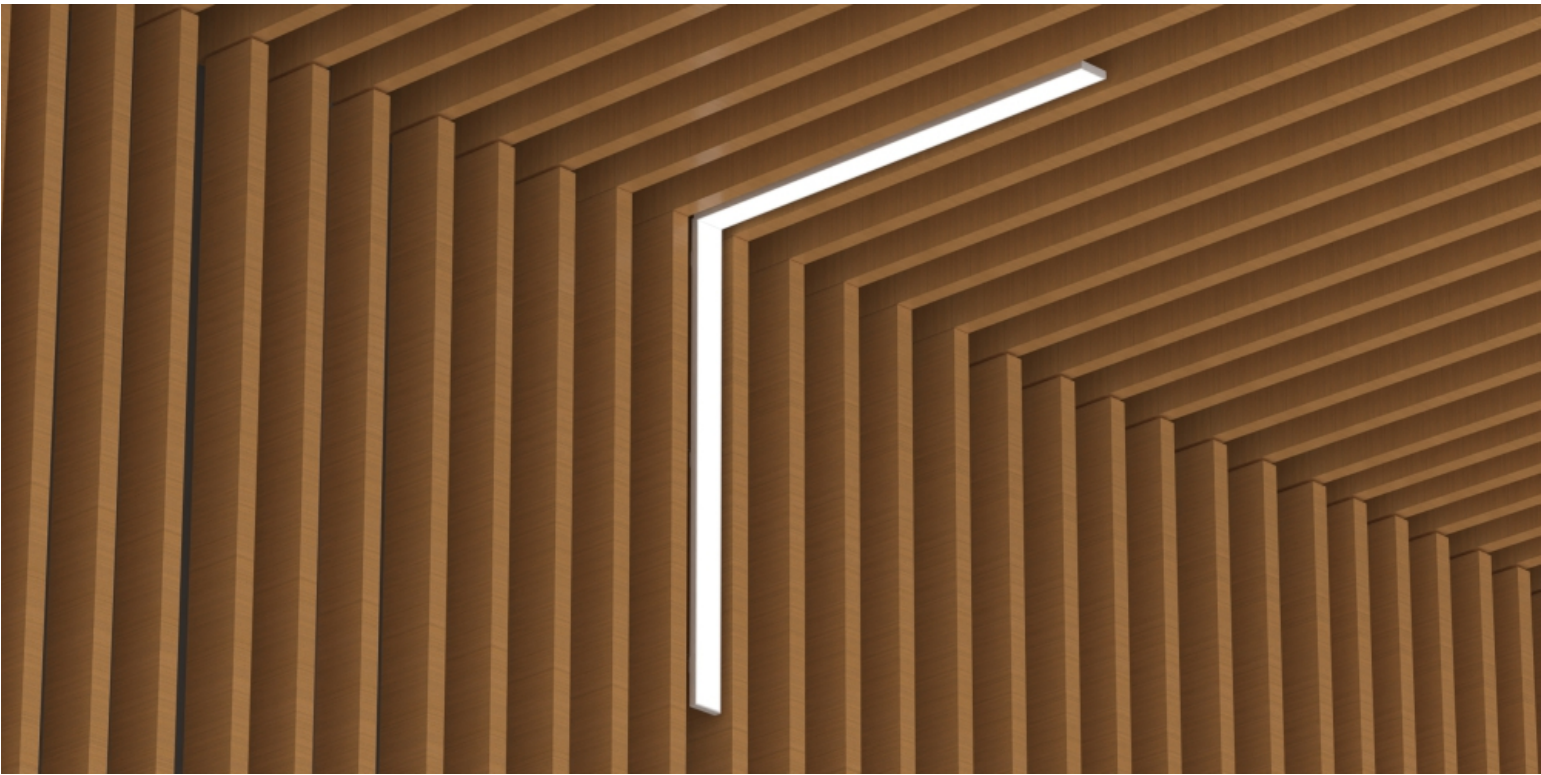

archlit reserves the right to make changes without prior notice. (09.14.2026)

ChriBa 3 Slots, extruded aluminum minimal design lighting fixture with remote drivers (max 20' from fixture). Powder-coated finish and diffuser for even illumination at highest lumen output. 1,250 lumens delivered per foot, 11 w/foot. Dimmable and non dimmable. Based on Armstrong WoodWorks linear solid wood panels and WoodWorks linear veneered panels. Lighting module width 3.25".

ChBa3Slo

ChriBa 3 Slots

Acronym of model

ChBa3Slo -
Please add at beginning of spec

Lumen Output Horizontal

H35 - Horizontal 3500 K 840 lumens/foot 7.5 w/ f
H35HO - Horizontal 3500 K 1260 lumen/foot 11 w/f
H40 - Horizontal 4000 K 840 lumen/foot 7.5 w/ f
H40HO - Horizontal 4000 K 1260 lumen/foot 11 w/f
NoH - No Horizontal
2700 K and 3000 K available for special ordering
Consult factory for other color temperatures
Max 8' nominal length with std output
HO max. length 5' nominal

Lumen Output Vertical

V35 - Vertical 3500 K 840 lumen/foot 7.5 w/ f
V35HO - Vertical 3500 K 1260 lumen/foot 11 w/f
V40 - Vertical 4000 K 840 lumen/foot 7.5 w/ f
V40HO - Vertical 4000 K 1260 lumen/foot 11 w/ f
NoV - No Vertical
2700 K and 3000 K available for special ordering
Consult factory for other color temperatures
Max 8' nominal length with std output
HO max. length 5' nominal

Finish

WH - White
BK - Black
CU - Custom Specify RAL color
set up charges apply

Runs Horizontal

HB - Horizontal Run 2' 23 3/4"
HC - Horizontal Module 3' 35 5/8
HD - Horizontal Module 4' 47 3/8
HE - Horizontal Module 5' 59 1/8
HF - Horizontal Module 6' 71
HG - Horizontal Module 7' 82 3/4"
HH - Horizontal 8' nominal 94 5/8"
HA - Horizontal Module 1' 12"
Use only as filler

Runs Vertical

VB - Vertical Run 2' 23 3/4"
VC - Vertical Module 3' 35 5/8
VD - Vertical Module 4' 47 3/8
VE - Vertical Module 5' 59 1/8
VF - Vertical Module 6' 71
VG - Vertical Module 7' 82 3/4"
VH - Vertical Module 8' 94 5/8"
VA - Vertical Module 1' 12"
Use only as filler



Dimming



- 4 - Dimmable 0-10v (4wires, 120 or 277 v)
- 1 - Non Dimmable 277v
- 0 - Non Dimmable 120v



Emergency



- 00 - No Emergency
- EM - Emergency module max. 4'


Notes:


- Drivers are Remote. max segment length 8'
- Max distance to drivers 20'
- CRI more than 90. McAdam 3 bin
- Runs lengths may result in light leaks between fixtures
- archlit will generate submittals

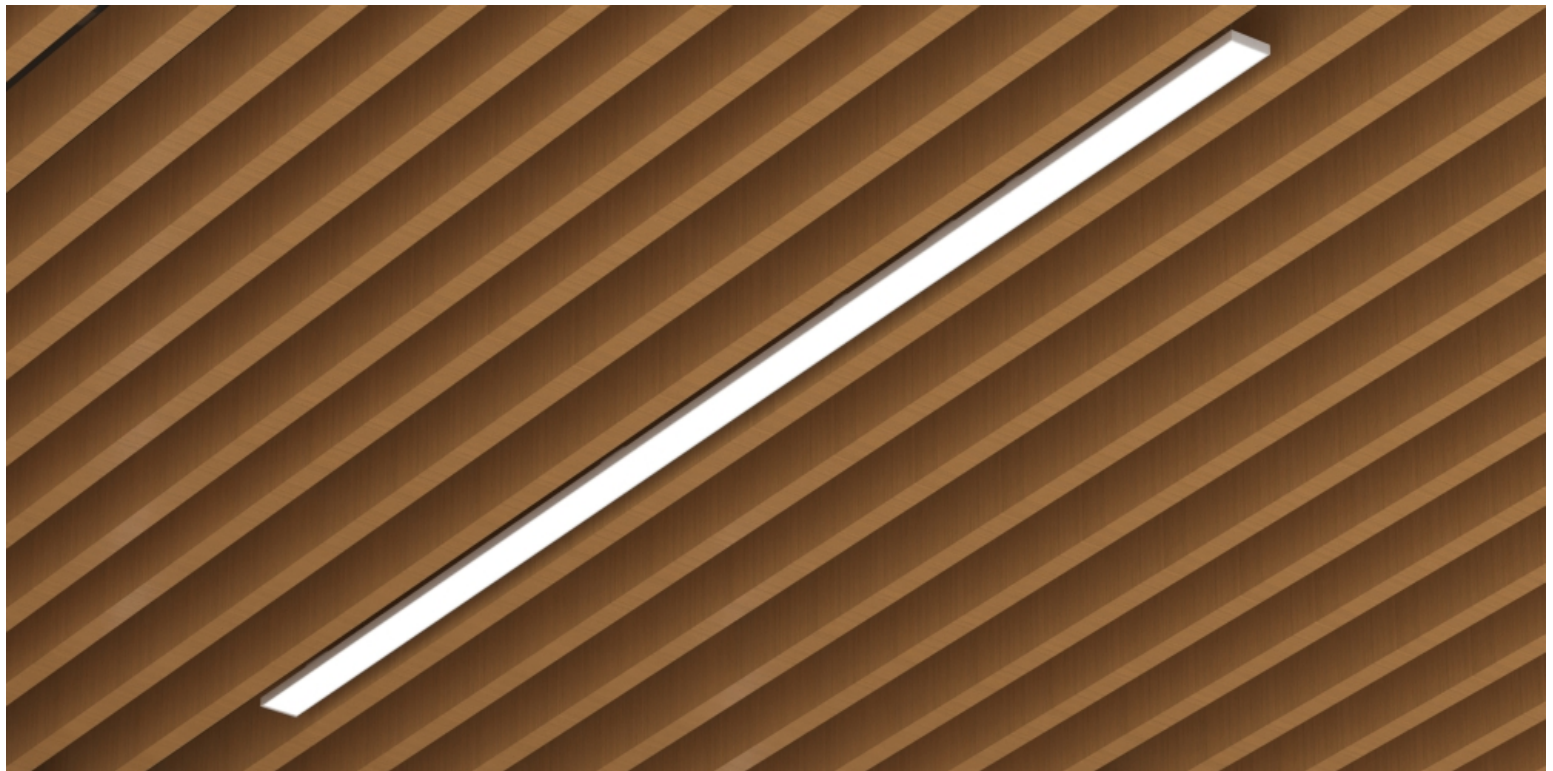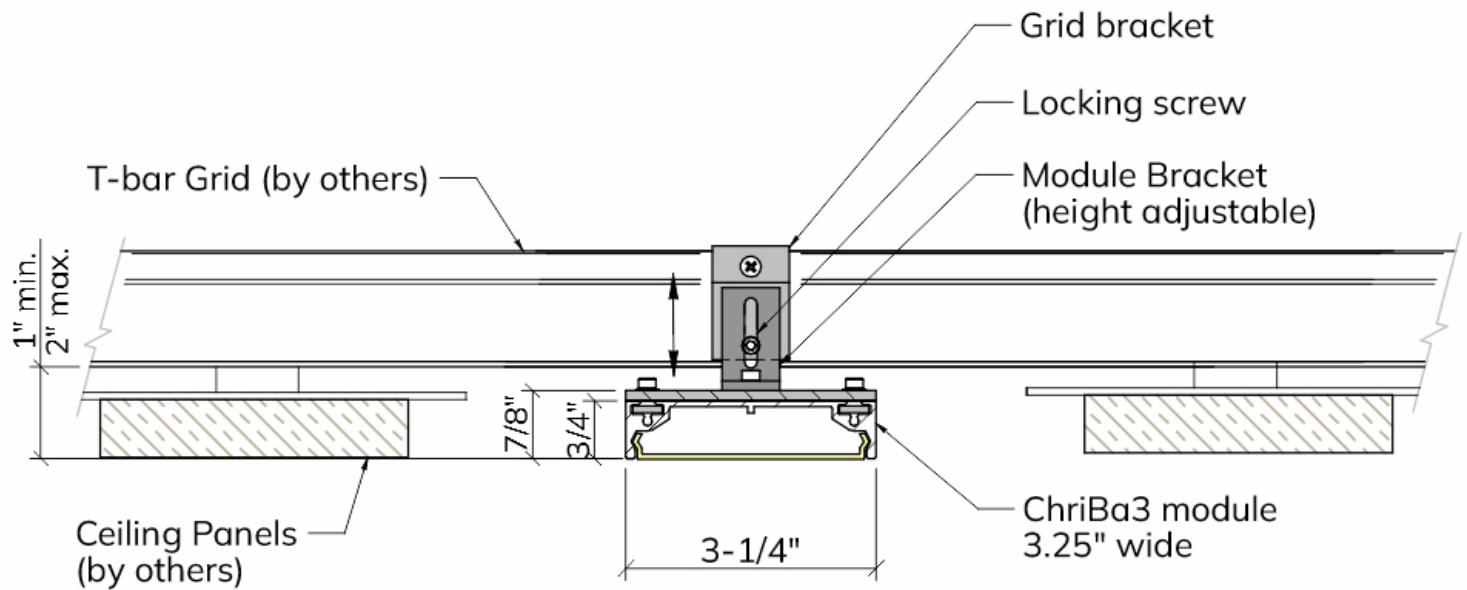

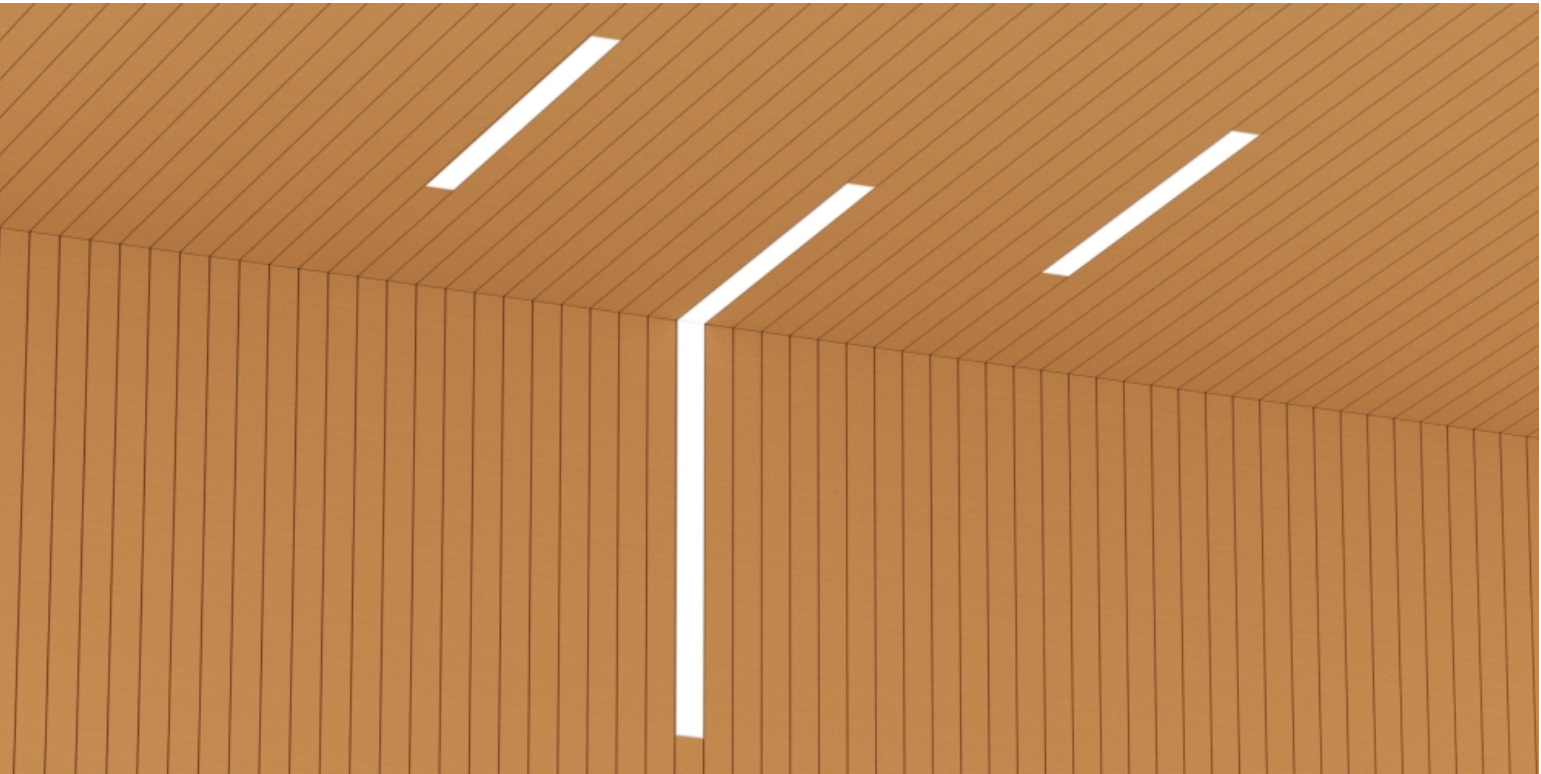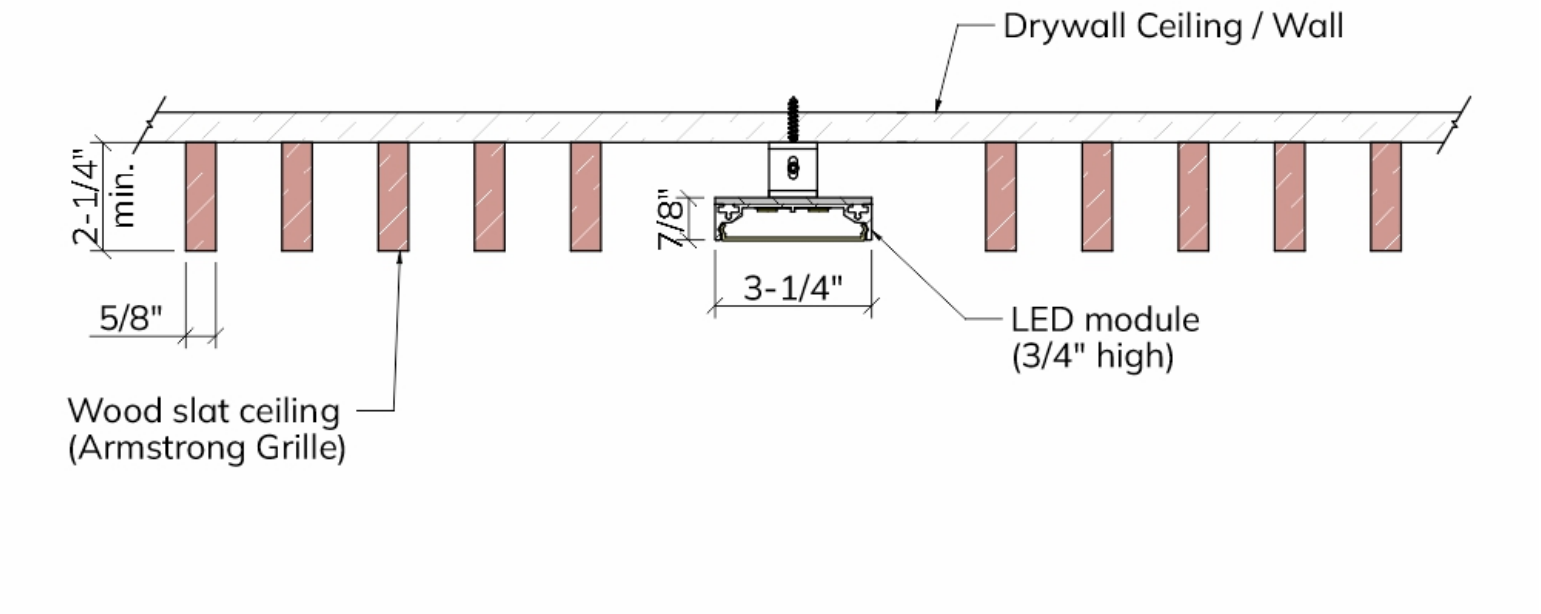


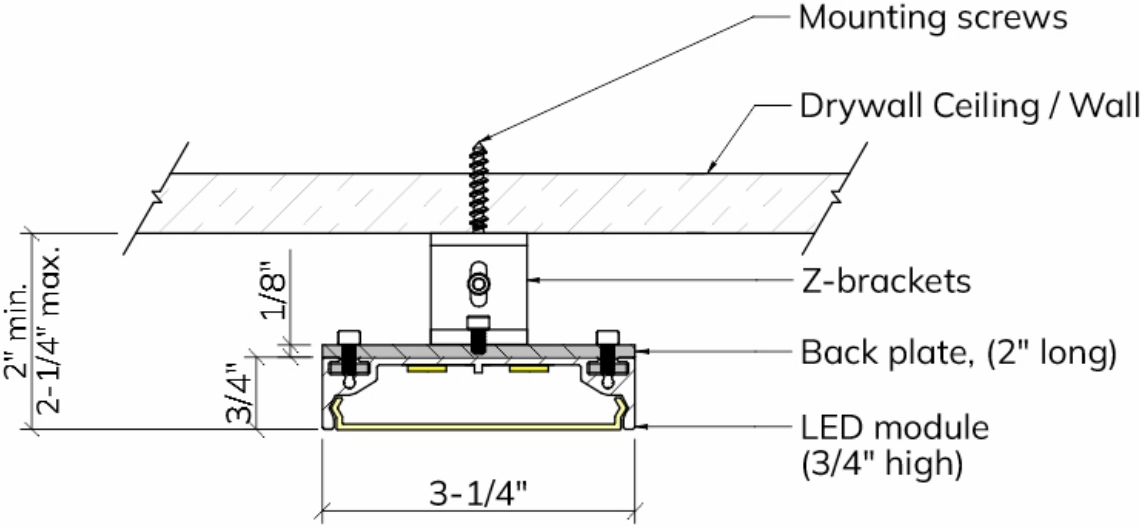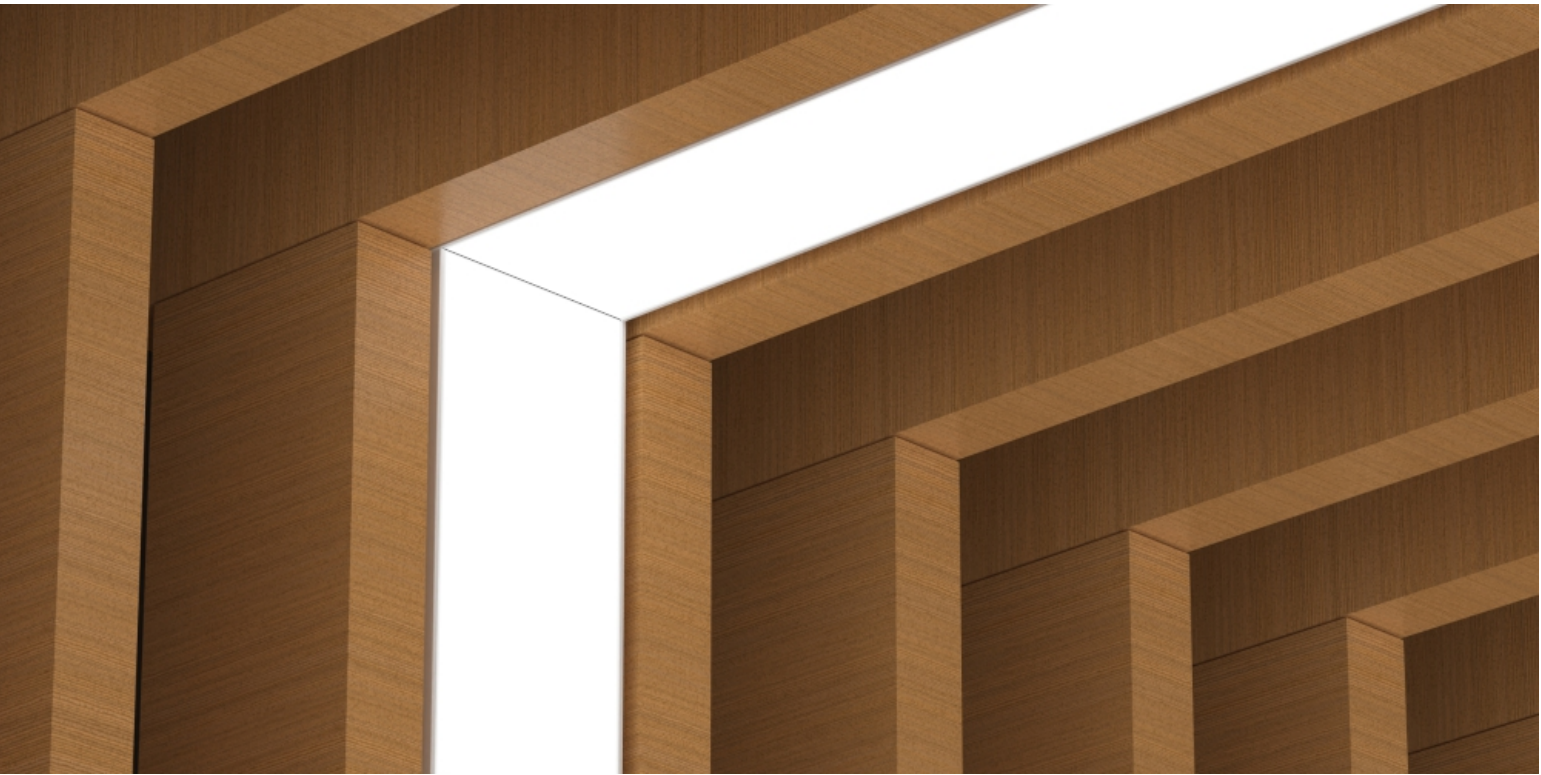

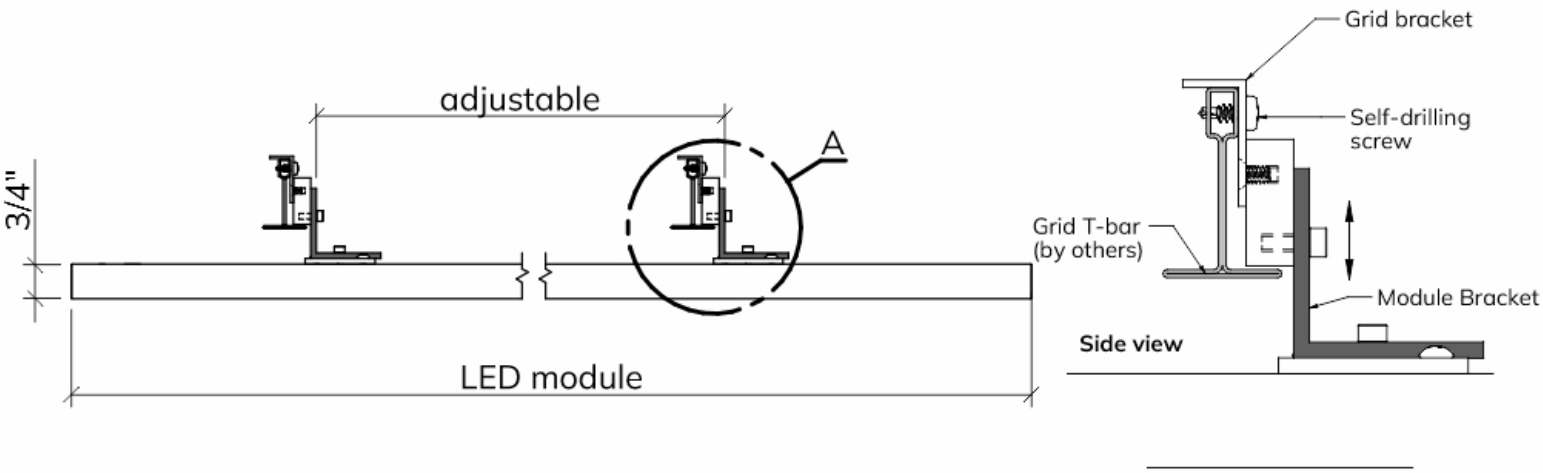

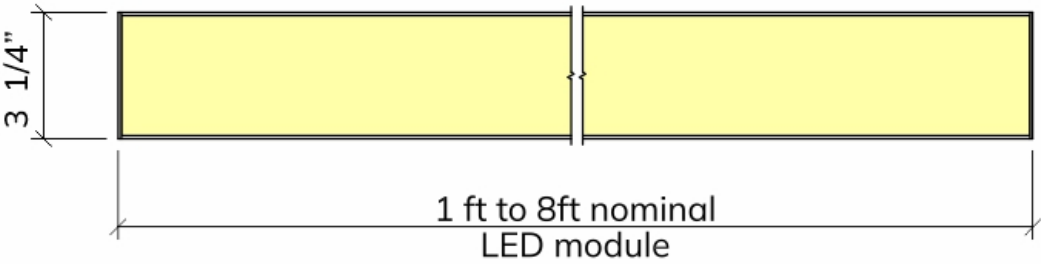


Individual module

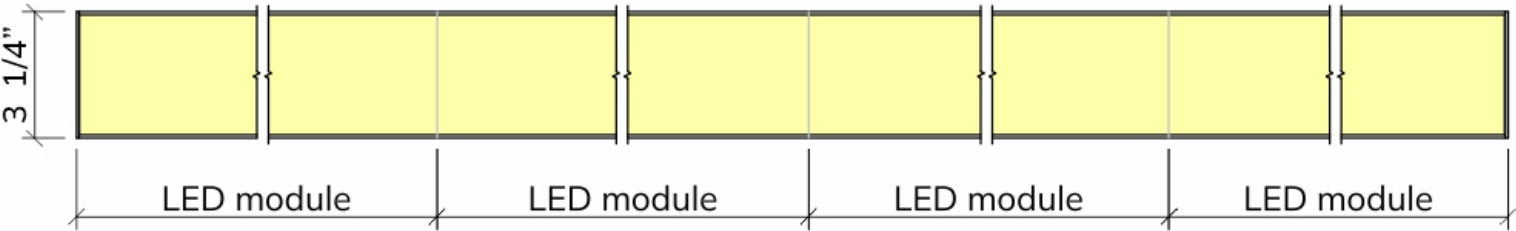

Continuous Run



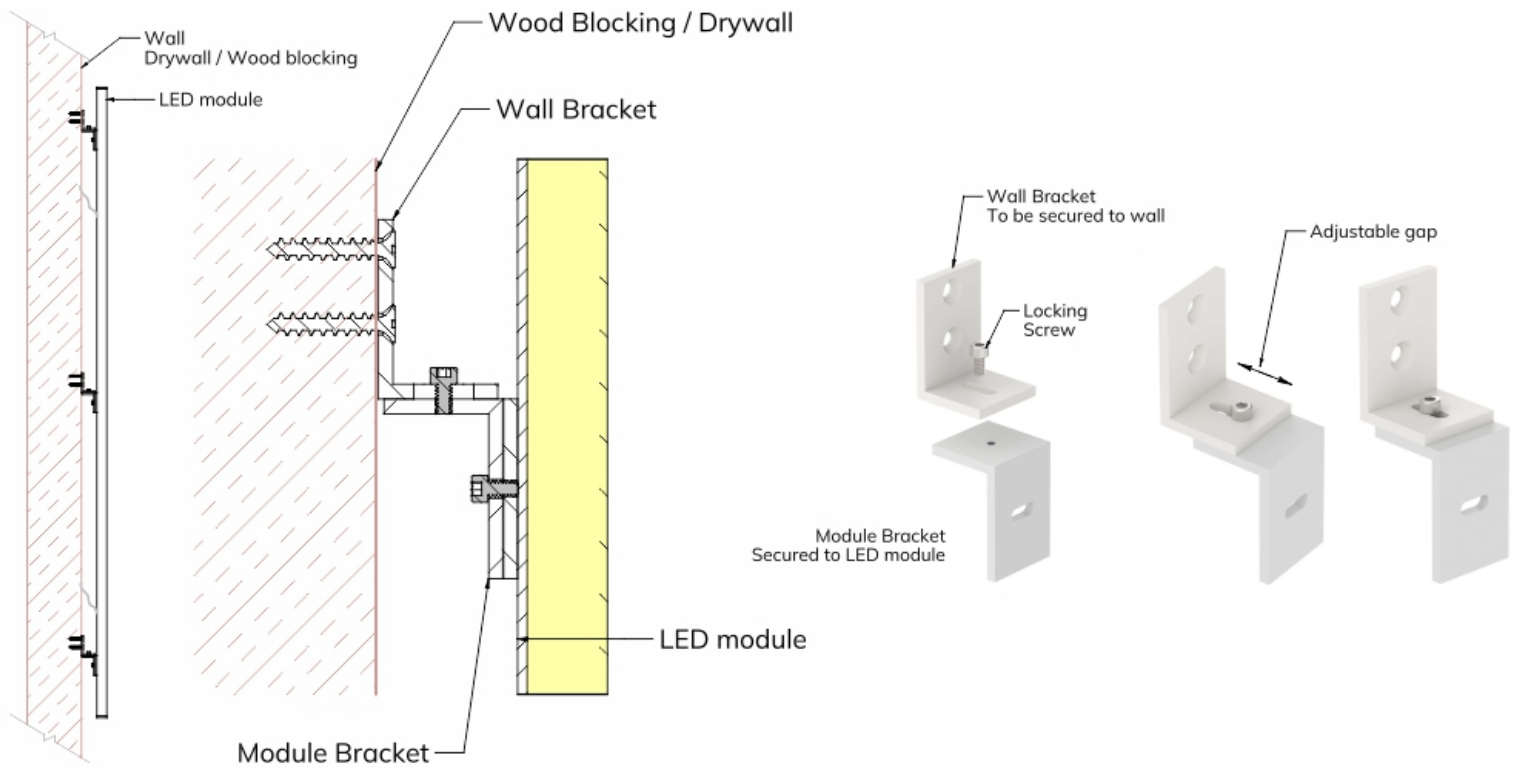

Driver Boxes

