



archlit reserves the right to make changes without prior notice. (07.12.2026)
ChriBa 5 CeiWall extruded aluminum minimal design lighting fixture with remote drivers (max 20' from fixture). Powder-coated finish and diffuser for even illumination at highest lumen output. 1,250 lumens delivered per foot, 11 w/foot. Dimmable and non dimmable. Individual and runs assemblies

Chri5Ceiw
ChriBa 5 CeiWall

Acronym of model

Chri5Ceiw -
Please add at beginning of spec

Lumen Output

35 - 3500 K 1260 lumen/foot 12 w/f
40 - 4000 K 1260 lumen/foot 12 w/f
2700 K and 3000 K available for special ordering
Consult factory for other color temperatures
Max 8' nominal length

Installation

Cei - Ceiling
Wa - Wall
Specify qty of vertical (wall) and horizontal (ceiling)

Runs

B - 2' nominal
C - 3' nominal
D - 4' nominal
E - 5' nominal
F - 6' nominal
G - 7' nominal
H - 8' nominal
Total Run: (0 ft 0 in)

Finish

WH - White
BK - Black
CU - Custom Specify RAL color
set up charges apply

Dimming

4 - Dimmable 0-10v (4wires, 120 or 277 v)
1 - Non Dimmable 277v
0 - Non Dimmable 120v


Emergency



00 - No Emergency
EM - Emergency module max. 4'



Notes:

Drivers are Remote.
Max distance to drivers 20'
CRI more than 90. McAdam 3 bin
archlit will produce submittals



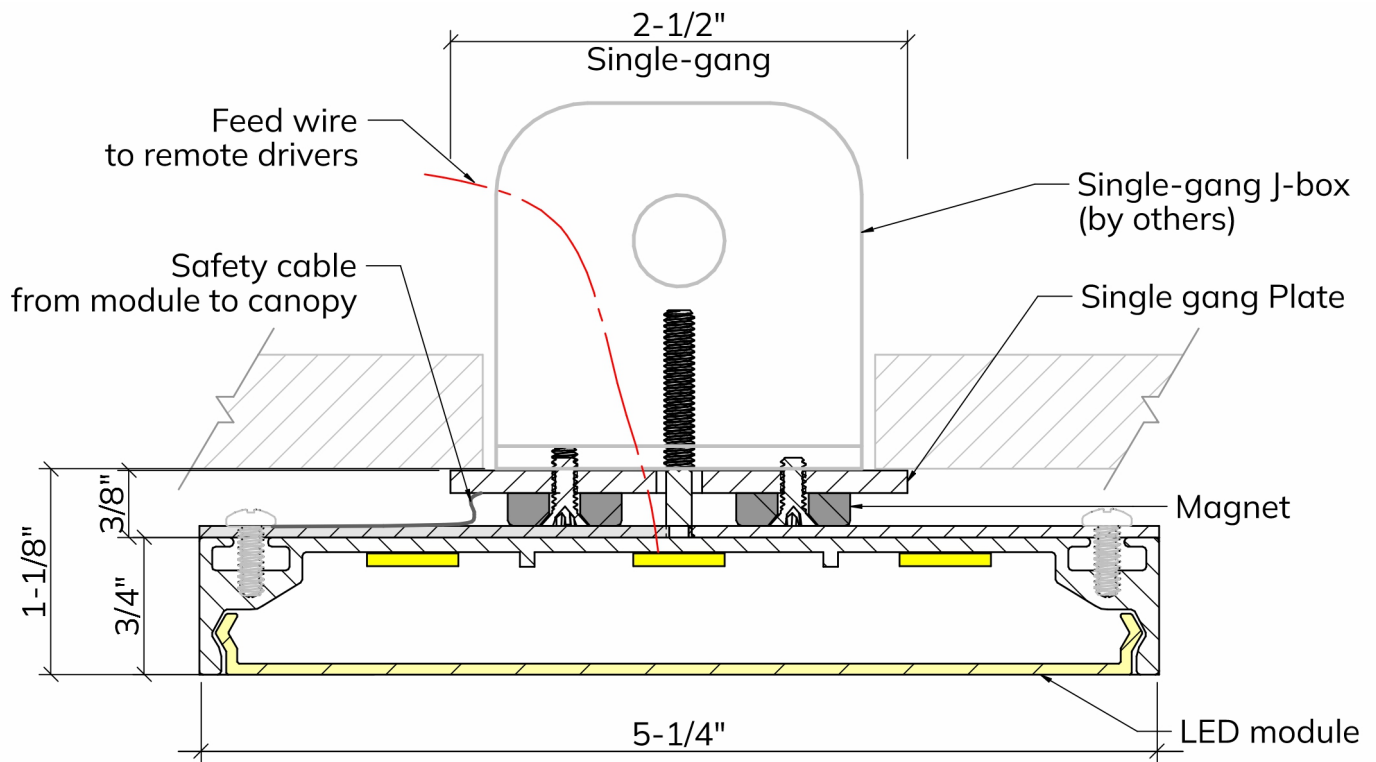

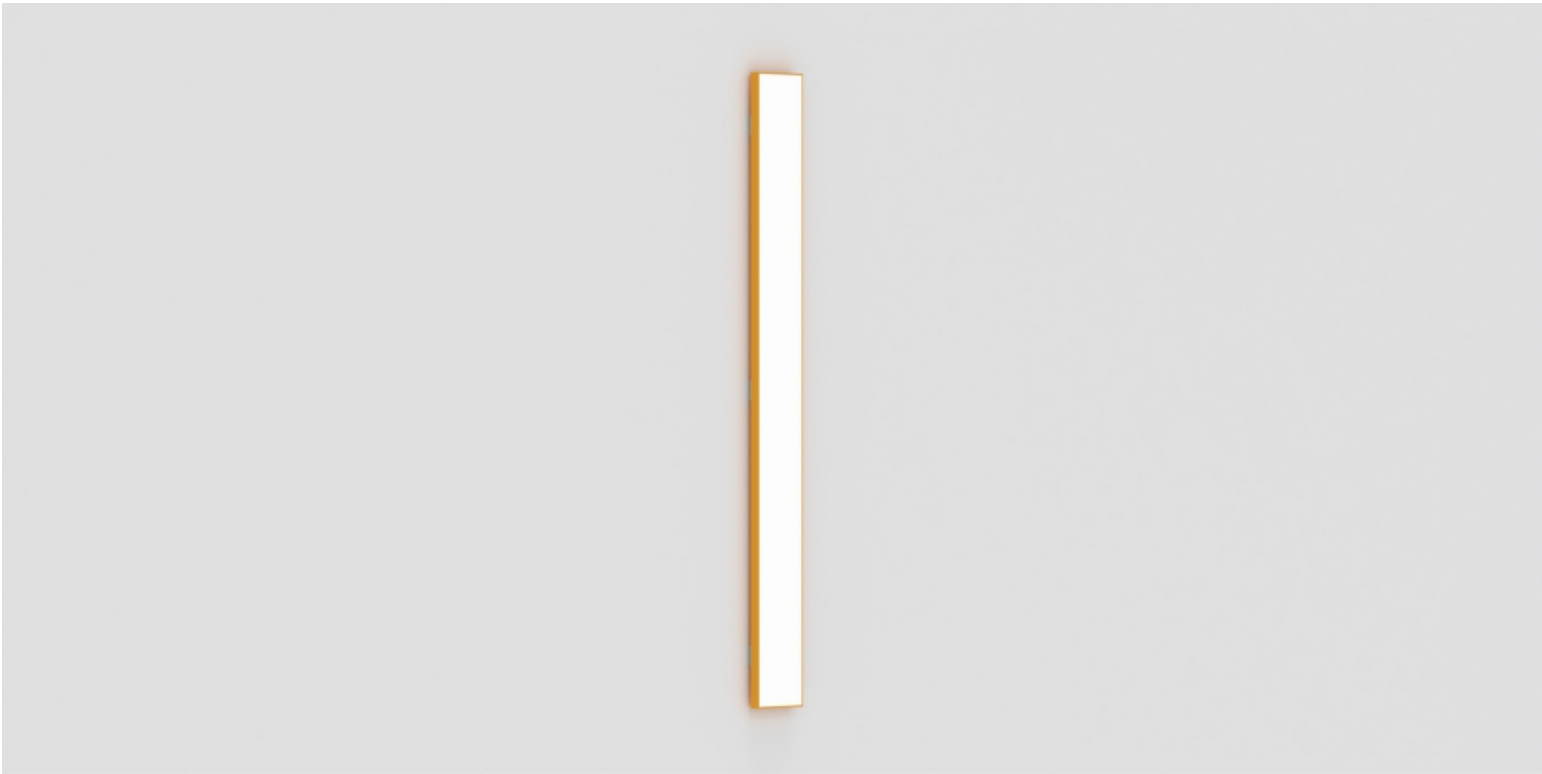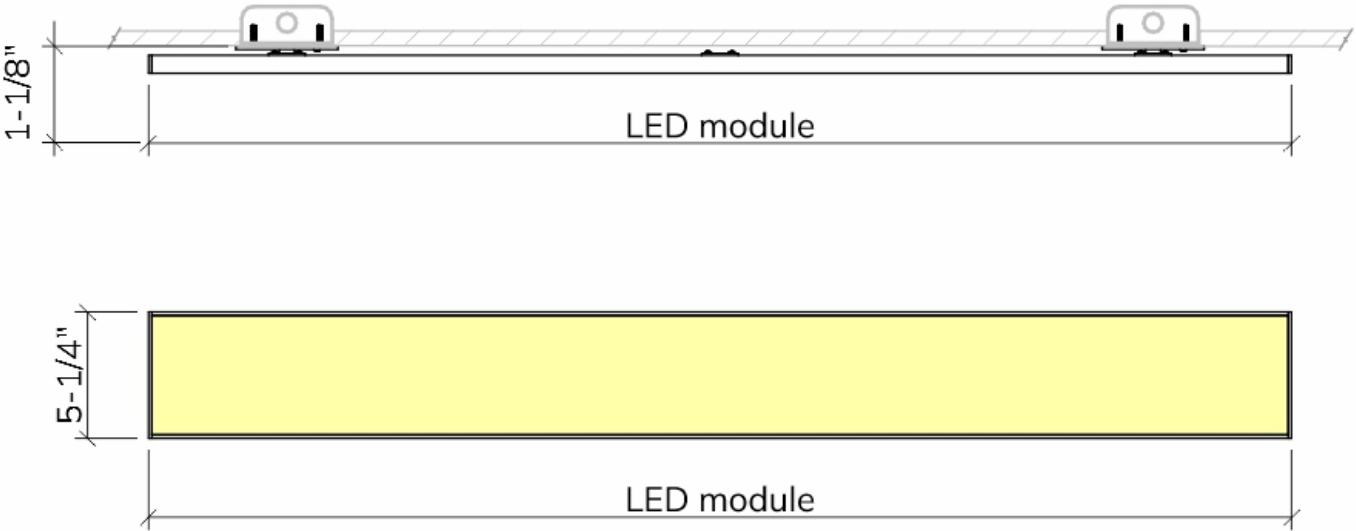

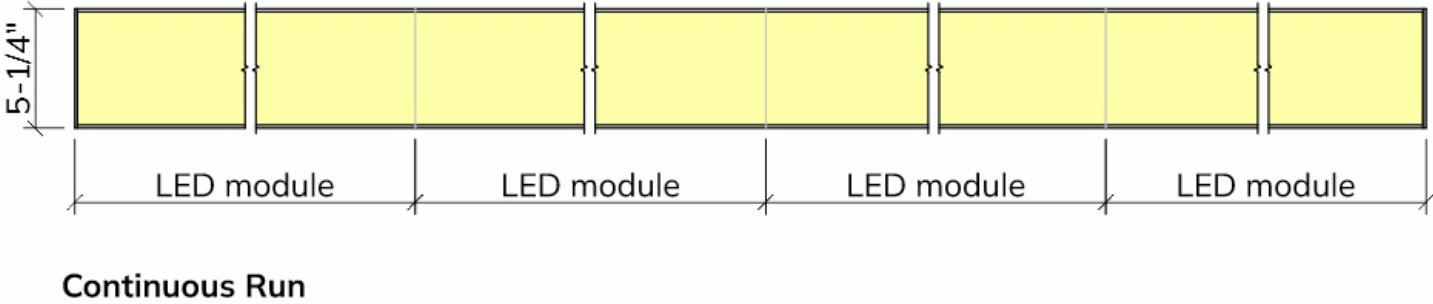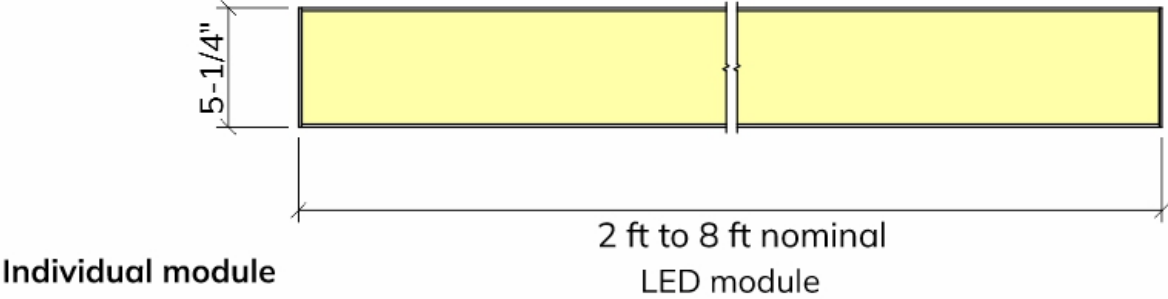



Nominal foot	Intermediate Module length	End module length
1' only as filler	12"	12-1/8"
2'	23-3/4"	23-7/8"
3'	35-5/8"	35-3/4"
4'	47-3/8"	47-1/2"
5'	59-1/8"	59-1/4"
6'	71"	71-1/8"
7'	82-3/4"	82-7/8"
8'	94-5/8"	94-3/4"



Driver Boxes

