


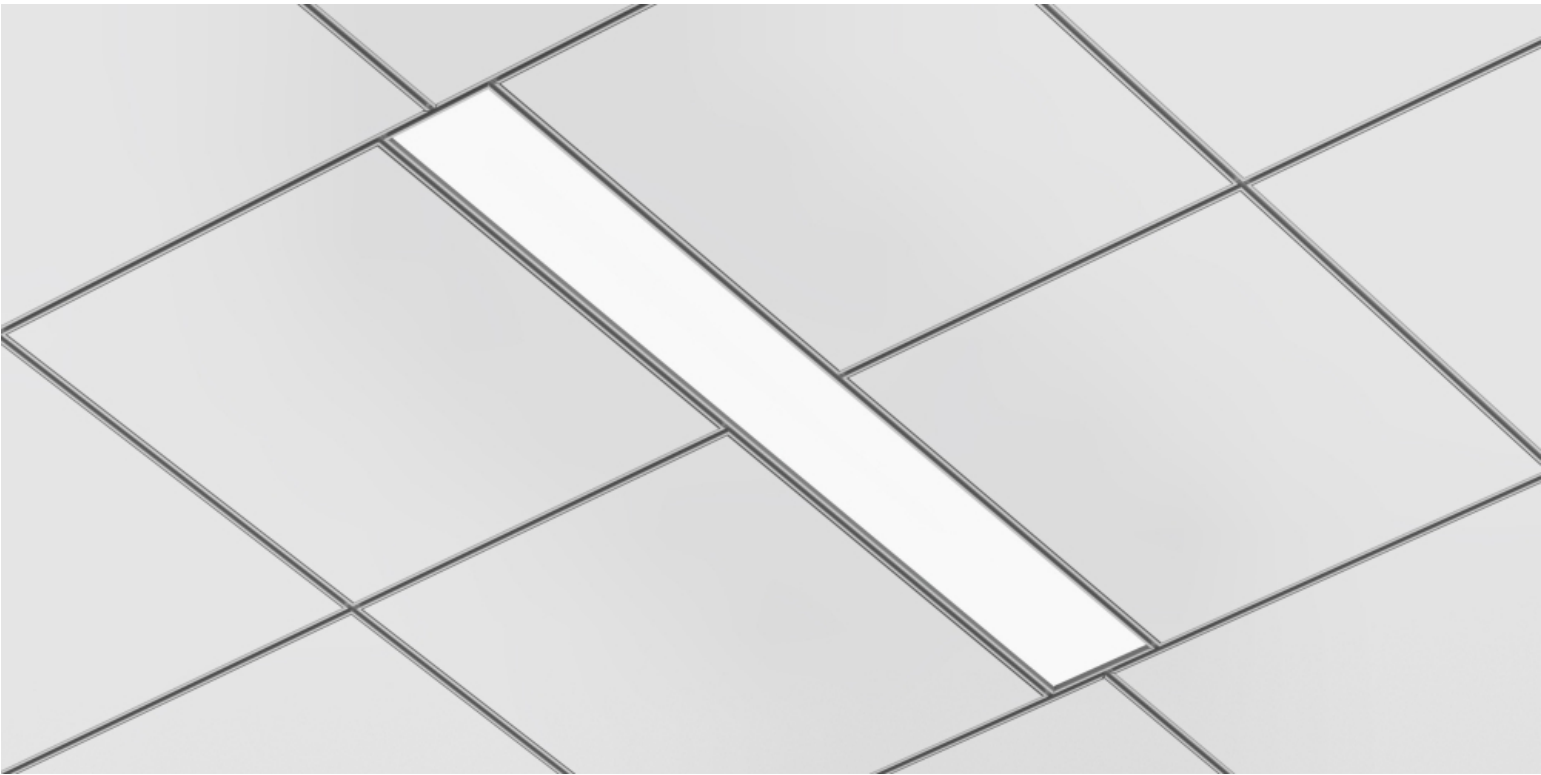

archlit reserves the right to make changes without prior notice. (07.01.2026)
ChriBa 5 Grid, extruded aluminum minimal design lighting fixture with remote drivers (max 20' from fixture).
Powder-coated finish and diffuser for even illumination at highest lumen output. 1,250 lumens delivered per foot, 11 w/foot. Dimmable and non dimmable.

ChBa5Gri
ChriBa 5 Grid

Acronym of model

ChBa5Gri -
Please add at beginning of spec

Lumen Output

35 - 3500 K 1260 lumen/foot 11 w/f
40 - 4000 K 1260 lumen/foot 11 w/f
2700 K and 3000 K available for special ordering
Consult factory for other color temperatures
Max 8' nominal length with std output

Lighting Modules

inB - Individual 2' nominal 24"
inD - Individual 4' nominal 47 5/8"
inE - Individual 5' nominal 59 3/8"
inF - Individual 6' nominal 71 3/8"

Finish

WH - White
BK - Black
CU - Custom Specify RAL color
set up charges apply

Dimming

4 - Dimmable 0-10v (4wires, 120 or 277 v)
1 - Non Dimmable 277v
0 - Non Dimmable 120v


Emergency

00 - No Emergency
EM - Emergency module max. 4'


Notes:


Drivers are Remote.
Max distance to drivers 20'
CRI more than 90. McAdam 3 bin




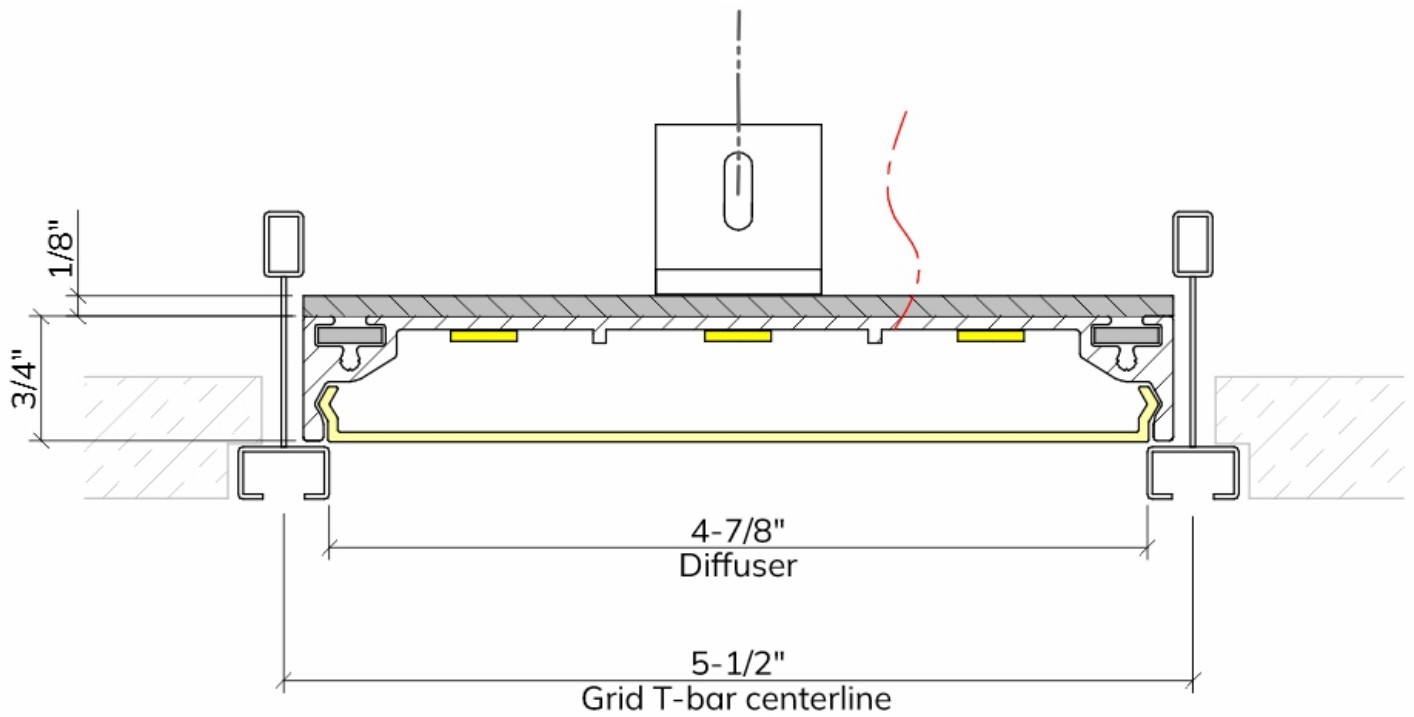


9/16" T-slotted grid bar


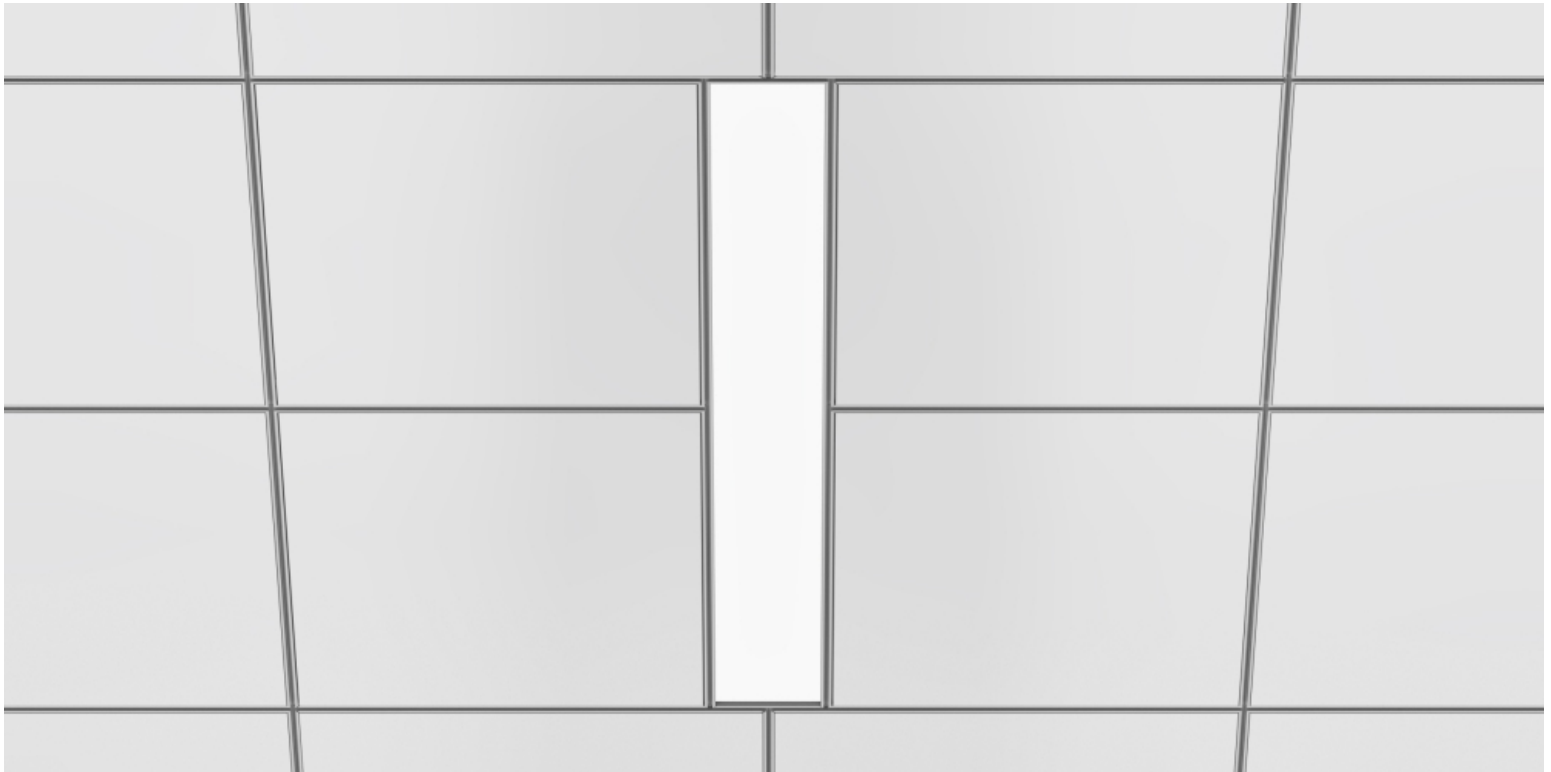


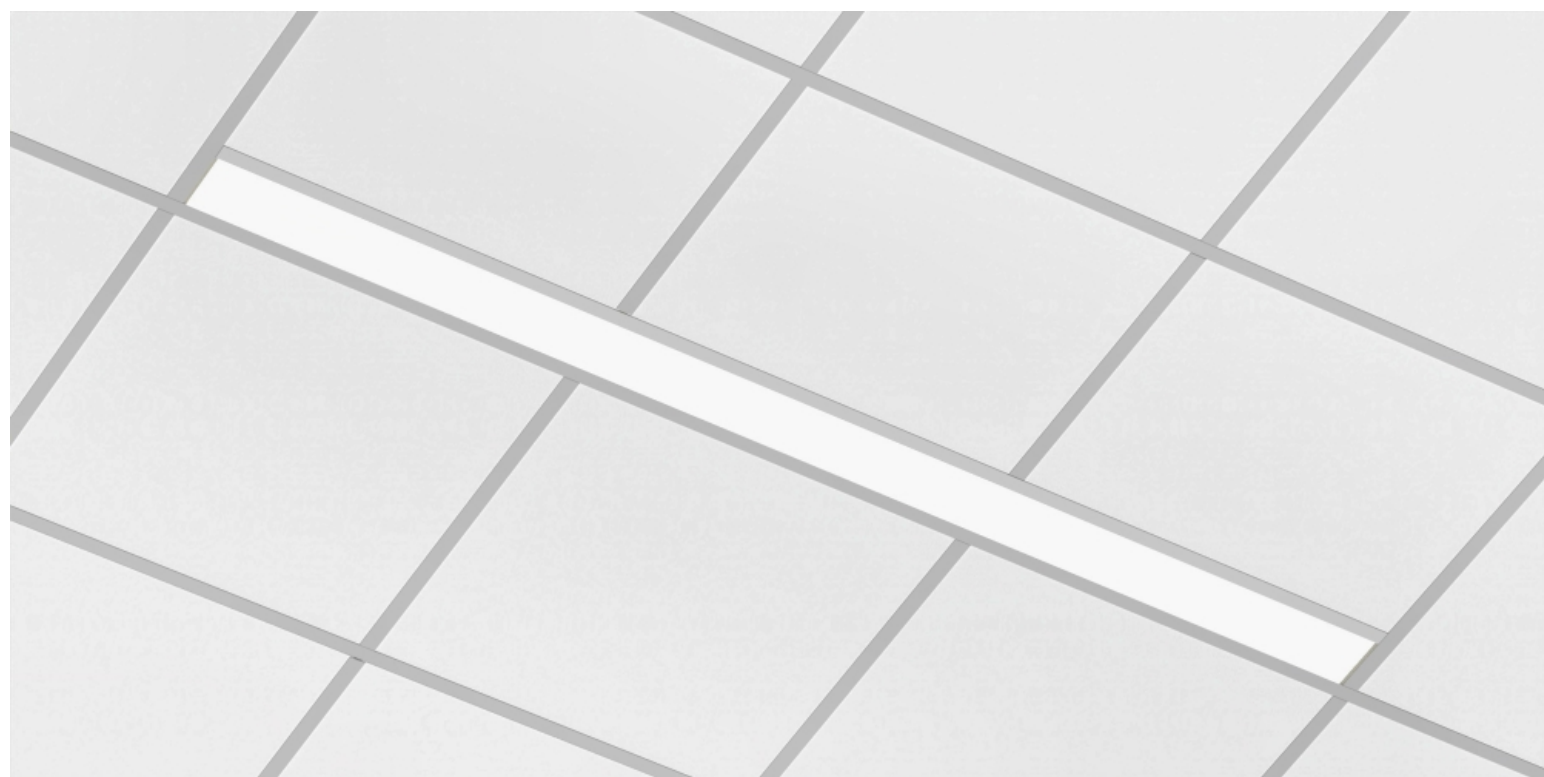


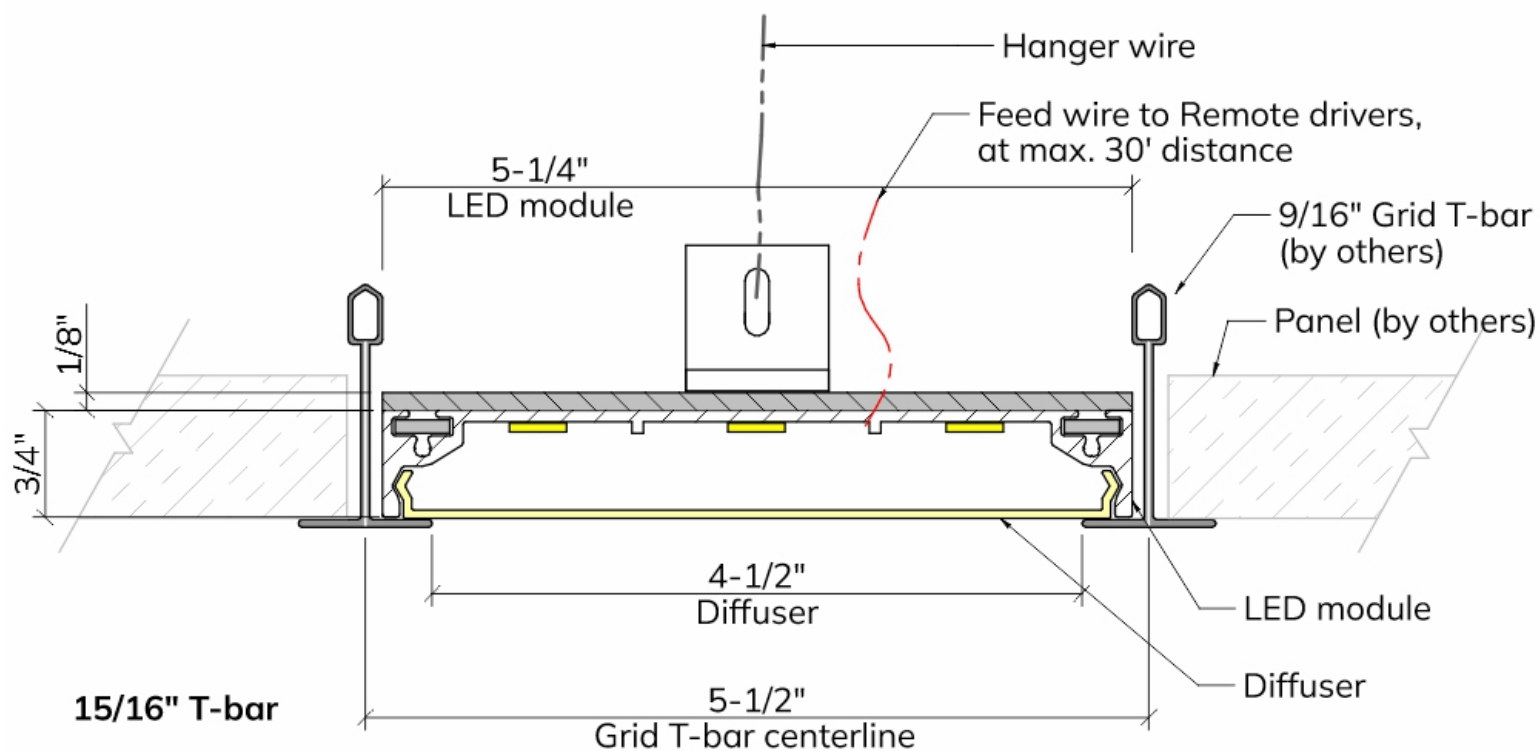

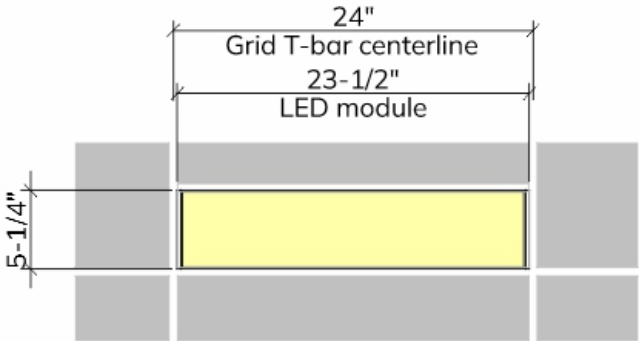

nom. ft	Individual module
2	23-1/2"
4	47-5/8"
6	71-1/2"

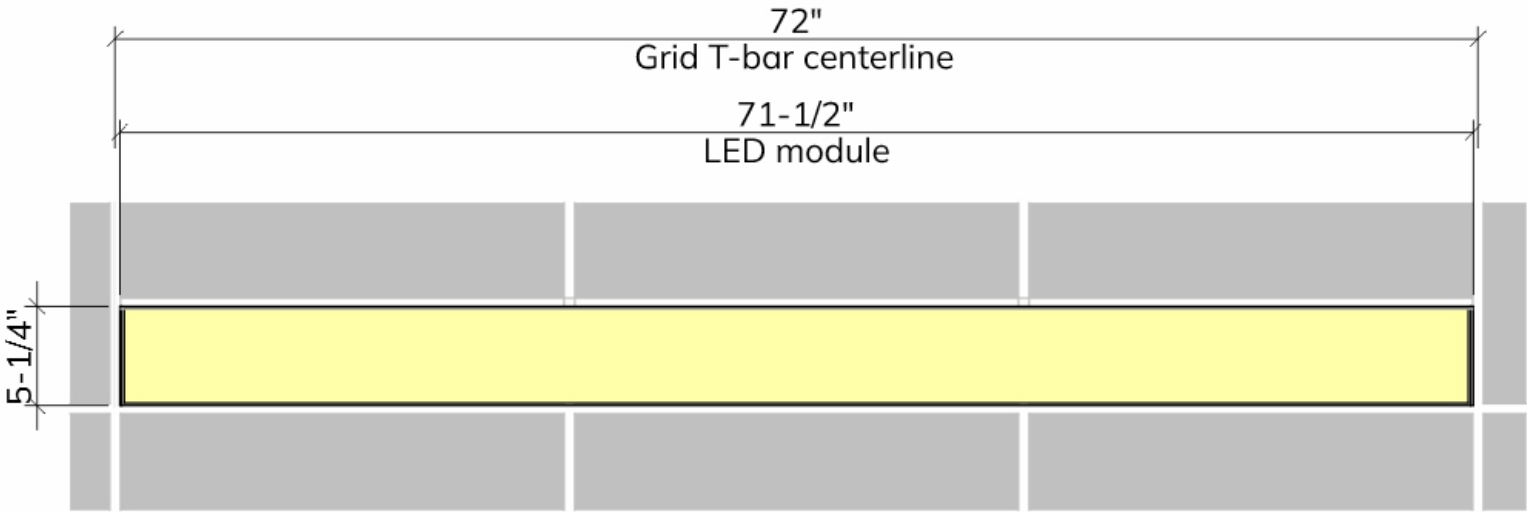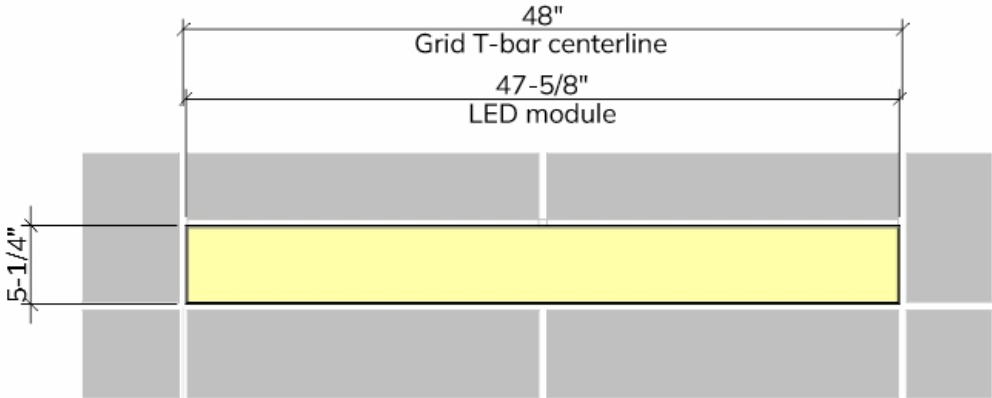

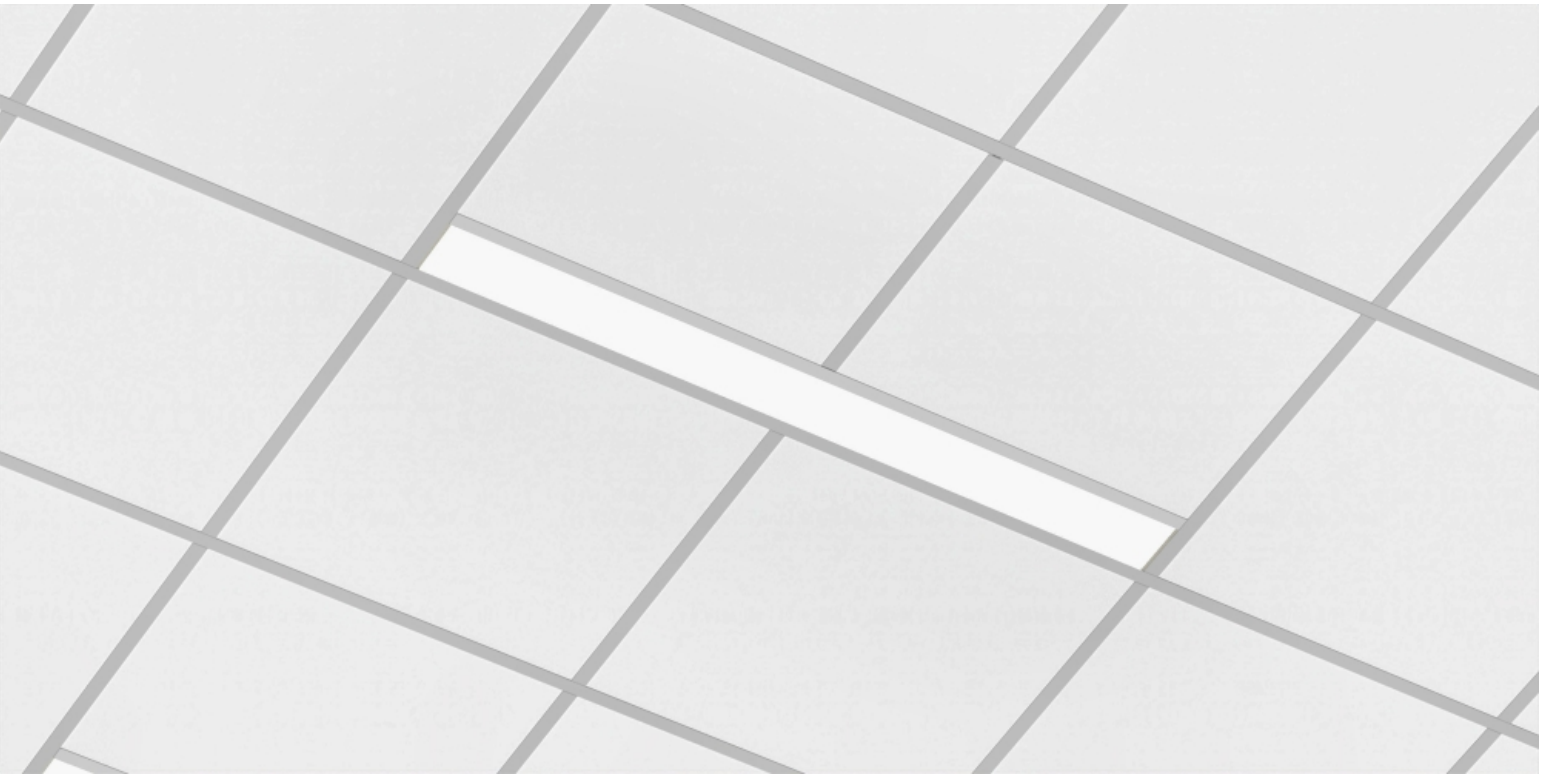

Driver Boxes

